
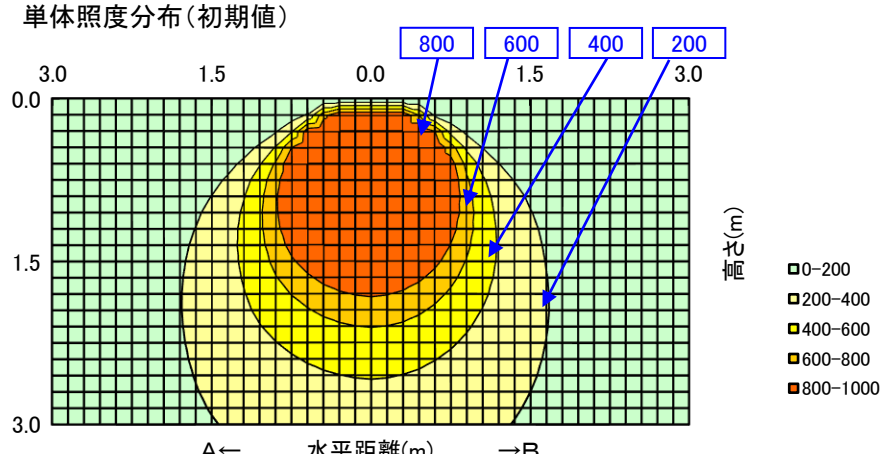
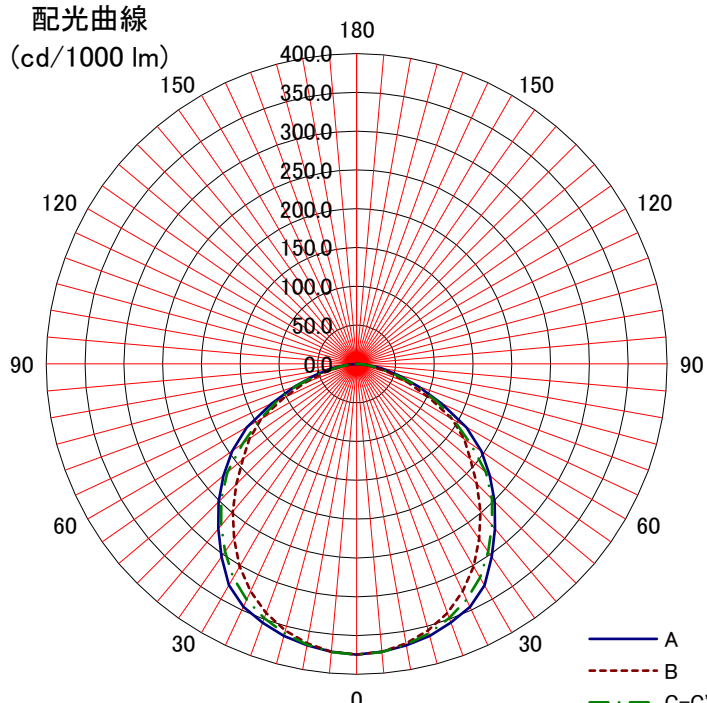


日立照明器具 照明特性

名称: 一体形LEDベース (スクエアタイプ)	反射率	天井	80%				70%				50%				30%				0%
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
		床	10%															0%	
形式: TE324AL-JZU14A	室指数	固有照明率 S/H=1.0																	
〈備考〉	0.6	0.60	0.48	0.41	0.58	0.48	0.40	0.35	0.46	0.40	0.35	0.45	0.39	0.35	0.33				
	0.8	0.69	0.59	0.51	0.68	0.58	0.51	0.45	0.56	0.50	0.45	0.55	0.49	0.45	0.43				
姿図 	1	0.76	0.66	0.58	0.74	0.65	0.58	0.53	0.63	0.57	0.52	0.62	0.56	0.52	0.50				
	1.25	0.82	0.73	0.66	0.80	0.72	0.65	0.60	0.70	0.64	0.60	0.68	0.63	0.59	0.57				
	1.5	0.86	0.78	0.72	0.84	0.77	0.71	0.66	0.75	0.70	0.66	0.73	0.69	0.65	0.63				
	2	0.92	0.85	0.79	0.90	0.84	0.79	0.74	0.82	0.77	0.74	0.80	0.76	0.73	0.70				
	2.5	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.79	0.84	0.81	0.78	0.75				
	3	0.97	0.92	0.87	0.95	0.91	0.87	0.83	0.89	0.85	0.82	0.87	0.84	0.81	0.78				
	4	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.90	0.87	0.90	0.88	0.86	0.83				
光源形式	5	1.02	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.90	0.93	0.91	0.89	0.86				
器具光束 7,130 lm	7	1.04	1.02	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.95	0.93	0.91				
	10	1.06	1.04	1.03	1.04	1.03	1.02	1.00	1.01	1.00	0.98	0.99	0.98	0.97	0.94				
器具効率 Ft= 100%		単体照度分布(初期値) 																	
上方光束 Fu= 0%																			
下方光束 Fd= 100%																			
最大取付間隔																			
A-A 1.30 H																			
B-B 1.20 H																			
保守率	良																		0.86
	中	0.81																	
	否	0.76																	
光度 (cd/1000 lm)		A-0	B-B	C-0	A'-0	C'-0	配光曲線 (cd/1000 lm) 												
	0	375	375	375															
	10	368	366	368															
	20	355	342	349															
	30	329	302	318															
	40	277	248	271															
	50	224	191	217															
	60	163	142	145															
	70	85	71	84															
	80	31	22	25															
	90																		
	100																		
	110																		
	120																		
	130																		
	140																		
	150																		
	160																		
	170																		
	180																		