
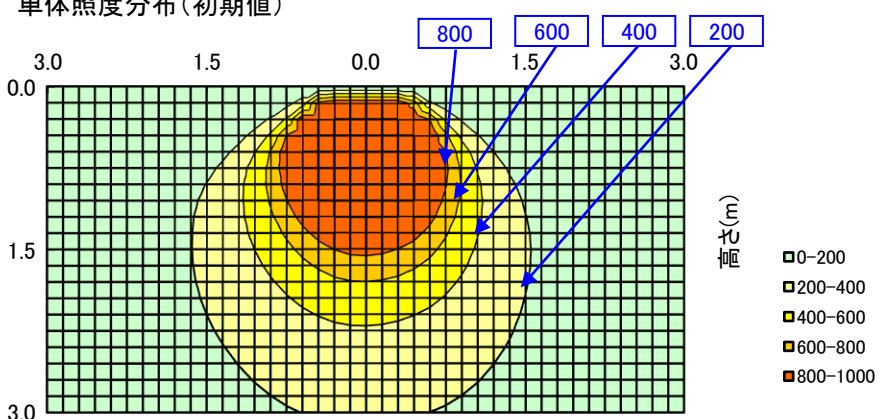
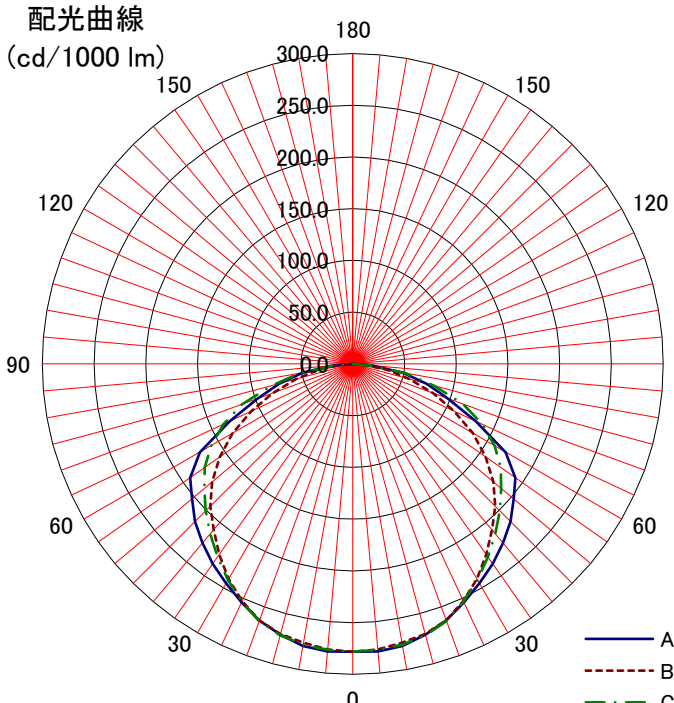


日立照明器具 照明特性																	
名称: 直管形LED搭載器具	反射率	天井	80%			70%				50%			30%			0%	
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
		床	10%														0%
形式: TME4201-JM14AE	室指数	照明率 S/H=1.0															
<備考>	0.6	0.51	0.40	0.33	0.50	0.39	0.32	0.27	0.38	0.32	0.27	0.37	0.31	0.27	0.25		
	0.8	0.60	0.49	0.41	0.58	0.48	0.41	0.36	0.47	0.41	0.36	0.46	0.40	0.36	0.34		
姿図 	1	0.65	0.55	0.48	0.64	0.54	0.48	0.42	0.53	0.47	0.42	0.52	0.46	0.42	0.40		
	1.25	0.71	0.62	0.55	0.69	0.61	0.54	0.49	0.59	0.53	0.49	0.57	0.52	0.48	0.46		
	1.5	0.75	0.67	0.60	0.73	0.66	0.60	0.55	0.64	0.59	0.54	0.62	0.58	0.54	0.51		
	2	0.80	0.73	0.68	0.79	0.72	0.67	0.62	0.70	0.66	0.62	0.69	0.65	0.61	0.59		
	2.5	0.83	0.77	0.72	0.82	0.76	0.72	0.68	0.74	0.70	0.67	0.73	0.69	0.66	0.64		
	3	0.86	0.80	0.76	0.84	0.79	0.75	0.71	0.77	0.74	0.70	0.75	0.72	0.69	0.67		
	4	0.89	0.84	0.81	0.87	0.83	0.80	0.77	0.81	0.78	0.75	0.79	0.77	0.74	0.72		
光源	5	0.90	0.87	0.84	0.89	0.86	0.83	0.80	0.84	0.81	0.79	0.82	0.80	0.78	0.75		
品名 直管形LEDランプ	7	0.93	0.90	0.88	0.91	0.89	0.87	0.85	0.87	0.85	0.83	0.85	0.84	0.82	0.80		
形式 LDK40SS・D/22/34NE	10	0.94	0.93	0.91	0.93	0.92	0.90	0.89	0.90	0.88	0.87	0.88	0.87	0.86	0.83		
光束 6,980 lm																	
器具効率 Ft= 90.2%		単体照度分布(初期値) 															
上方光束 Fu= 0%																	
下方光束 Fd= 90.2%																	
最大取付間隔																	
A-A 1.32 H																	
B-B 1.28 H																	
保守率	良 0.86 中 0.81 否 0.72																
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 															
	A-0 B-B C-0 A'-0 C'-0																
0	278 278 278																
10	277 274 276																
20	264 264 265																
30	245 240 241																
40	226 209 214																
50	203 177 187																
60	171 134 158																
70	98 83 114																
80	50 34 52																
90																	
100																	
110																	
120																	
130																	
140																	
150																	
160																	
170																	
180																	