
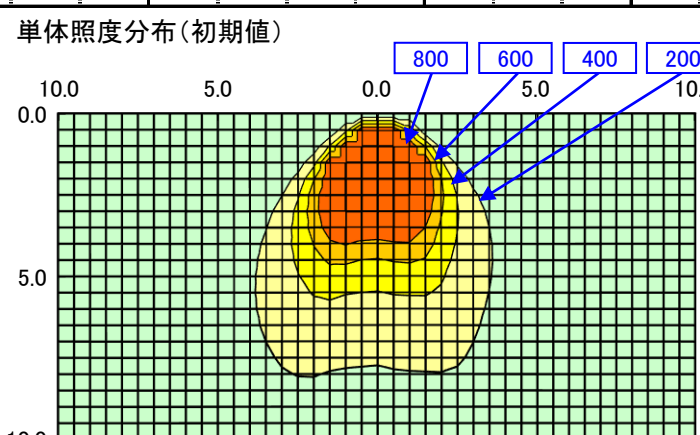
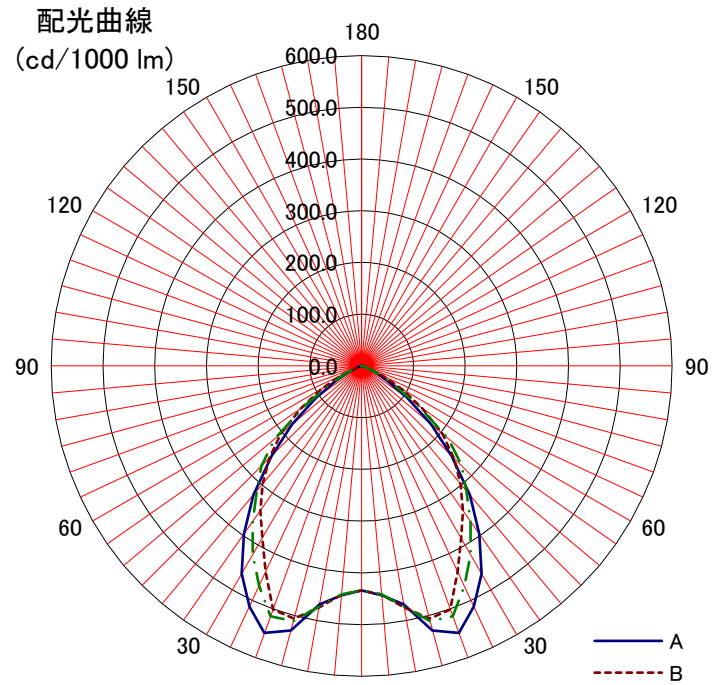
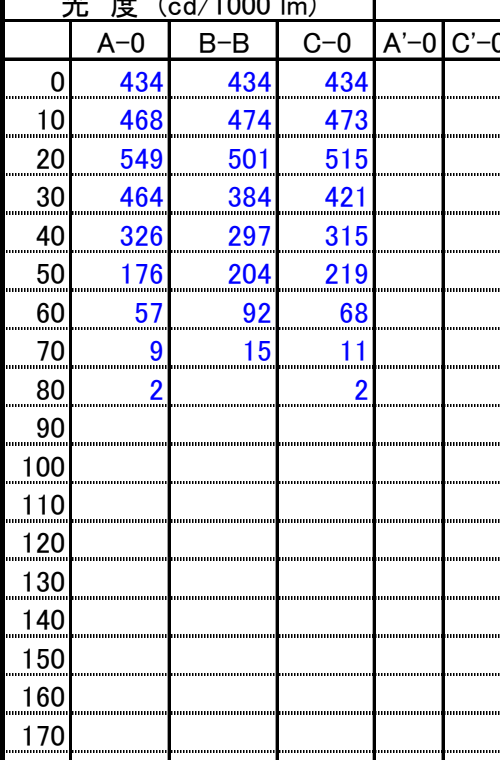


日立照明器具 照明特性

名称: 高天井用LED器具	天井 反射率	80%			70%				50%			30%			0%				
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
形式: WFMTE28AMN-J24A	床	10%															0%		
		室指数	固有照明率 S/H=1.0																
<備考> 配光角(広角)	0.6	0.67	0.58	0.51	0.66	0.57	0.51	0.47	0.56	0.51	0.47	0.55	0.50	0.47	0.45				
	0.8	0.77	0.68	0.62	0.76	0.68	0.62	0.58	0.67	0.61	0.58	0.65	0.61	0.57	0.56				
	1	0.83	0.75	0.70	0.82	0.75	0.69	0.65	0.73	0.69	0.65	0.72	0.68	0.64	0.63				
	1.25	0.88	0.81	0.76	0.87	0.81	0.76	0.72	0.79	0.75	0.71	0.78	0.74	0.71	0.69				
	1.5	0.92	0.86	0.81	0.91	0.85	0.81	0.77	0.83	0.80	0.76	0.82	0.79	0.76	0.74				
	2	0.96	0.91	0.88	0.95	0.91	0.87	0.84	0.89	0.86	0.83	0.87	0.85	0.82	0.80				
	2.5	0.99	0.95	0.91	0.97	0.94	0.90	0.88	0.92	0.89	0.87	0.90	0.88	0.86	0.83				
	3	1.00	0.97	0.93	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.90	0.88	0.86				
光源形式	4	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.92	0.94	0.93	0.91	0.89				
	5	1.04	1.01	0.99	1.02	1.00	0.98	0.97	0.98	0.97	0.95	0.96	0.95	0.94	0.91				
器具光束 27,500 lm	7	1.05	1.04	1.02	1.04	1.03	1.01	1.00	1.01	1.00	0.99	0.99	0.98	0.97	0.94				
	10	1.07	1.06	1.05	1.06	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.00	1.00	0.97				
器具効率 Ft= 100%		 単体照度分布(初期値) A← 水平距離(m) →B (m) 縦軸 0-200 200-400 400-600 600-800 800-1000																	
上方光束 Fu= 0%																			
下方光束 Fd= 100%																			
最大取付間隔		 配光曲線 (cd/1000 lm) — A — B — C-C'																	
A-A 1.42 H																			
B-B 1.28 H																			
保守率																			
良 0.81																			
中 0.79																			
否 0.75																			
光度 (cd/1000 lm)																			
A-0	B-B																C-0	A'-0	C'-0
0	434																434	434	
10	468																474	473	
20	549																501	515	
30	464	384	421																
40	326	297	315																
50	176	204	219																
60	57	92	68																
70	9	15	11																
80	2		2																
90																			
100																			
110																			
120																			
130																			
140																			
150																			
160																			
170																			
180																			