
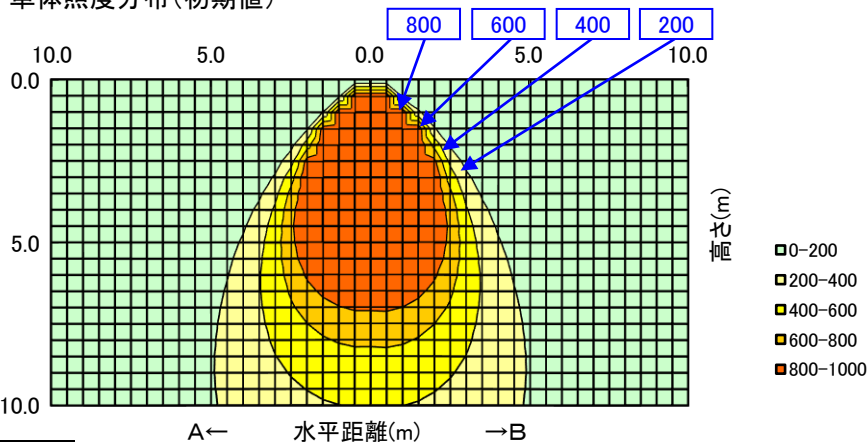
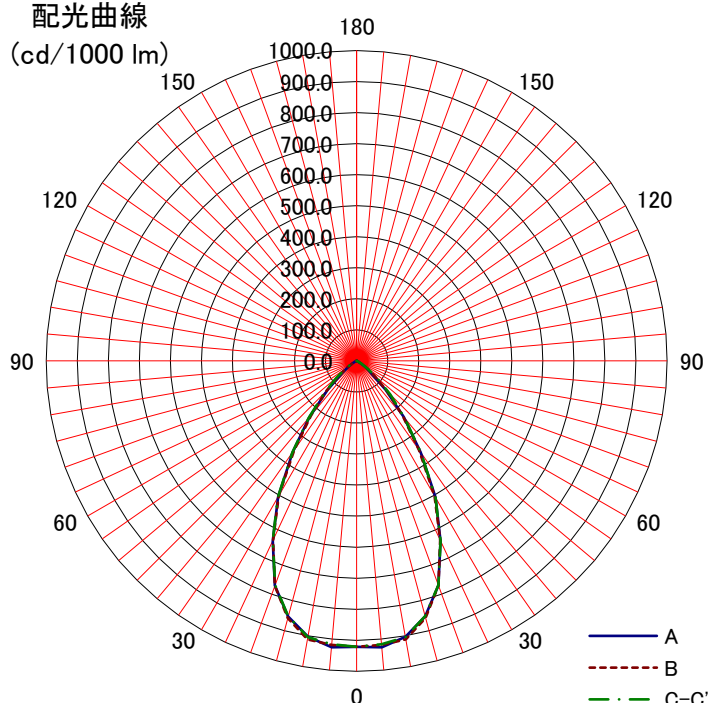


日立照明器具 照明特性

名称: 高天井用LED器具	反射率	天井 壁 床	80%			70%				50%			30%			0%			
			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
			10%														0%		
形式: WFMTE44ANN-J24A	室指数		固有照明率 S/H=1.0																
<備考> 配光角(中角)	0.6	0.80	0.73	0.69	0.79	0.73	0.68	0.65	0.72	0.68	0.65	0.71	0.68	0.65	0.64				
	0.8	0.88	0.81	0.77	0.87	0.81	0.77	0.74	0.80	0.76	0.74	0.79	0.76	0.74	0.72				
姿図 	1	0.92	0.86	0.83	0.91	0.86	0.82	0.79	0.85	0.82	0.79	0.84	0.81	0.79	0.77				
	1.25	0.96	0.91	0.87	0.95	0.90	0.87	0.84	0.89	0.86	0.83	0.88	0.85	0.83	0.81				
	1.5	0.98	0.94	0.91	0.97	0.93	0.90	0.88	0.92	0.89	0.87	0.91	0.88	0.86	0.85				
	2	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.94	0.92	0.91	0.89				
	2.5	1.03	1.00	0.97	1.02	0.99	0.97	0.95	0.97	0.95	0.94	0.96	0.94	0.93	0.91				
	3	1.04	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.97	0.95	0.97	0.95	0.94	0.92				
光源形式	4	1.05	1.03	1.01	1.04	1.02	1.00	0.99	1.00	0.99	0.97	0.98	0.97	0.96	0.94				
	5	1.06	1.04	1.03	1.05	1.03	1.02	1.01	1.01	1.00	0.99	0.99	0.99	0.98	0.95				
器具光束 43,800 lm	7	1.07	1.06	1.05	1.06	1.05	1.04	1.03	1.03	1.02	1.02	1.01	1.01	1.00	0.97				
	10	1.08	1.08	1.07	1.07	1.07	1.06	1.05	1.05	1.04	1.04	1.03	1.02	1.02	0.99				
器具効率 Ft= 100%		単体照度分布(初期値) 																	
上方光束 Fu= 0%																			
下方光束 Fd= 100%																			
最大取付間隔																			
A-A 0.96 H																			
B-B 0.96 H																			
保守率	良															0.81			
	中															0.79			
	否															0.75			
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 																	
	A-0															B-B	C-0	A'-0	C'-0
0	921															921	921		
10	903															912	903		
20	770															771	769		
30	507															502	509		
40	236															229	241		
50	60															76	85		
60	15															15	17		
70	4	4	3																
80	1	1	1																
90																			
100																			
110																			
120																			
130																			
140																			
150																			
160																			
170																			
180																			