
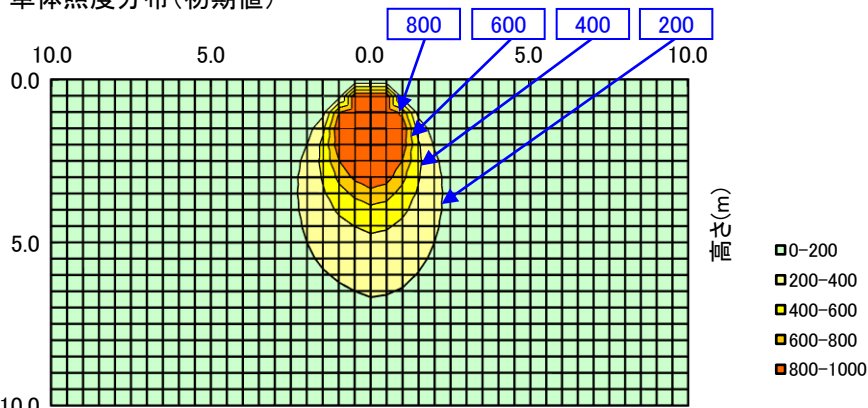
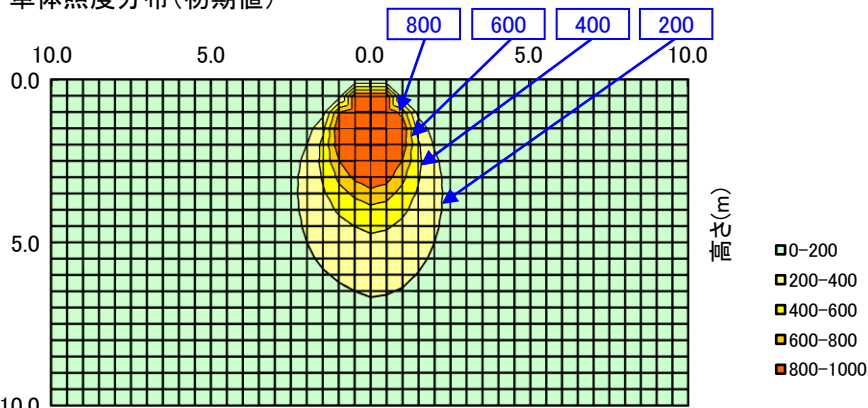
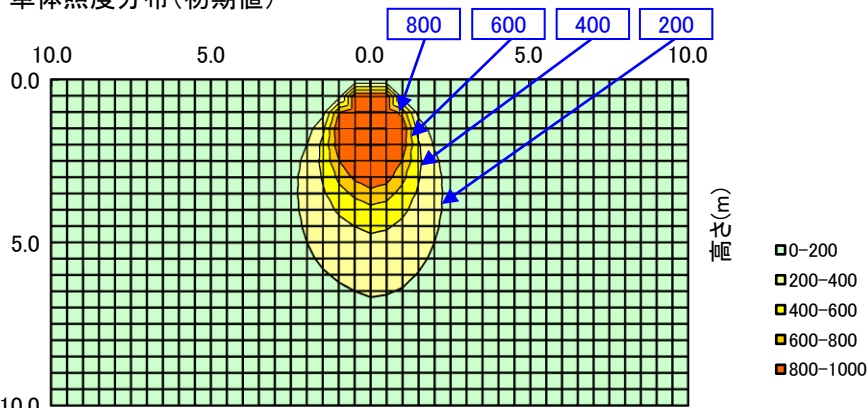
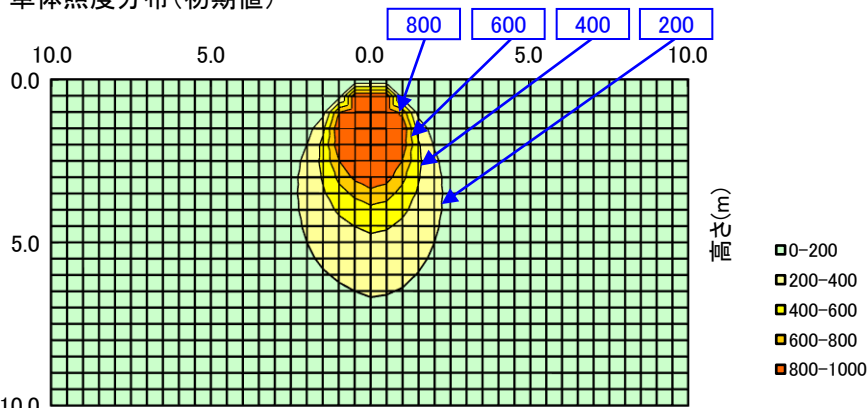


日立照明器具 照明特性

名称: 高天井用LED器具		反射率	天井	80%			70%			50%			30%			0%			
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%															0%
形式: WGMTE11ANN-J14A		室指数	固有照明率 S/H=1.0																
<備考> 配光角(中角)		0.6	0.74	0.66	0.60	0.73	0.65	0.60	0.57	0.64	0.60	0.56	0.64	0.59	0.56	0.55			
		0.8	0.83	0.75	0.70	0.82	0.75	0.70	0.66	0.74	0.69	0.66	0.73	0.69	0.66	0.64			
姿図 		1	0.88	0.81	0.76	0.87	0.80	0.76	0.73	0.79	0.75	0.72	0.78	0.75	0.72	0.70			
		1.25	0.92	0.86	0.82	0.91	0.85	0.81	0.78	0.84	0.80	0.78	0.83	0.80	0.77	0.75			
		1.5	0.95	0.90	0.86	0.94	0.89	0.85	0.82	0.88	0.84	0.82	0.86	0.84	0.81	0.79			
		2	0.99	0.95	0.91	0.97	0.94	0.91	0.88	0.92	0.89	0.87	0.91	0.88	0.86	0.85			
		2.5	1.01	0.97	0.94	0.99	0.96	0.93	0.91	0.94	0.92	0.90	0.93	0.91	0.89	0.87			
		3	1.02	0.99	0.96	1.01	0.98	0.95	0.93	0.96	0.94	0.92	0.94	0.92	0.91	0.89			
光源形式		4	1.03	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.95	0.94	0.91			
-		5	1.05	1.03	1.01	1.03	1.02	1.00	0.98	1.00	0.98	0.97	0.98	0.97	0.96	0.93			
器具光束		7	1.06	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.98	0.96			
10,600 lm		10	1.07	1.07	1.06	1.06	1.05	1.05	1.04	1.03	1.03	1.02	1.01	1.01	1.01	0.98			
器具効率 Ft= 100%			単体照度分布(初期値) 																
上方光束 Fu= 0%																			
下方光束 Fd= 100%																			
最大取付間隔			A← 水平距離(m) →B 																
A-A 0.90 H																			
B-B 0.90 H																			
保守率	良	0.81	配光曲線 (cd/1000 lm) 																
	中	0.79																	
	否	0.75																	
光度 (cd/1000 lm)																	A← 水平距離(m) →B 		
	A-0	B-B	C-0	A'-0	C'-0														
0	841	841	841																
10	749	787	756																
20	626	628	628																
30	443	436	444																
40	292	270	268																
50	151	141	138																
60	47	43	40																
70	6	6	6																
80	2	1	2																
90																			
100																			
110																			
120																			
130																			
140																			
150																			
160																			
170																			
180																			