
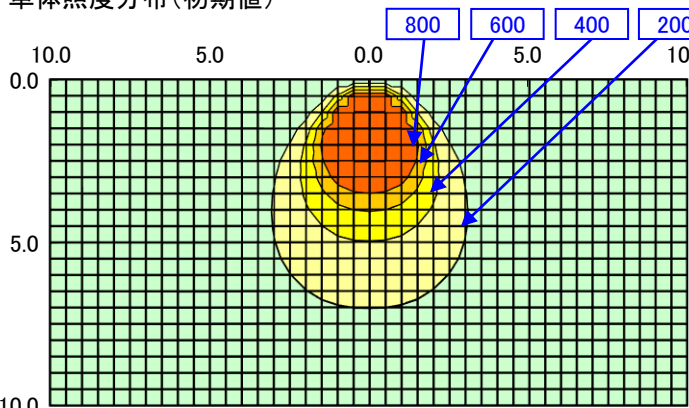

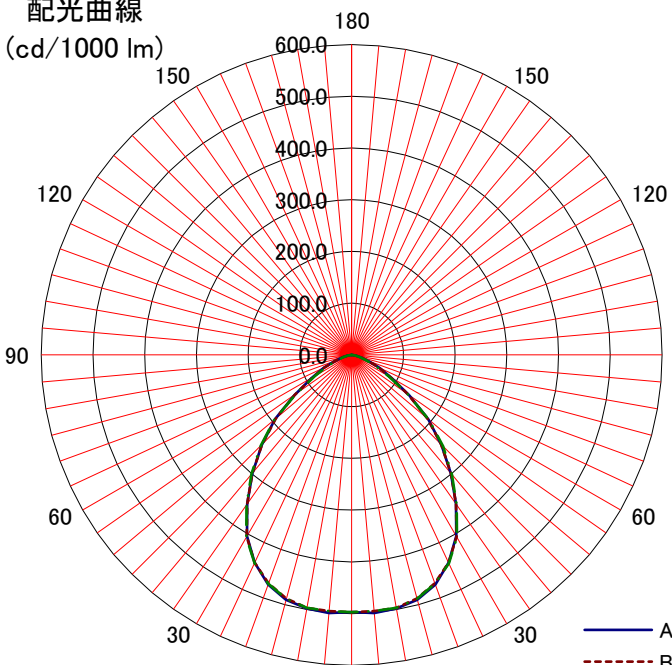


日立照明器具 照明特性

名称: 高天井用LED器具		反射率	天井	80%			70%				50%			30%			0%		
				70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
形式: WGMTE22AMN-J14B		室指数	壁	10%													0%		
				固有照明率 S/H=1.0														0%	
<備考>		0.6	0.66	0.56	0.50	0.65	0.56	0.49	0.45	0.55	0.49	0.45	0.54	0.49	0.45	0.43			
		0.8	0.76	0.67	0.60	0.75	0.66	0.60	0.56	0.65	0.59	0.55	0.64	0.59	0.55	0.53			
姿図 		1	0.82	0.74	0.68	0.81	0.73	0.67	0.63	0.72	0.66	0.63	0.70	0.66	0.62	0.60			
		1.25	0.87	0.80	0.74	0.86	0.79	0.74	0.70	0.77	0.73	0.69	0.76	0.72	0.69	0.67			
		1.5	0.91	0.84	0.79	0.90	0.83	0.79	0.75	0.82	0.78	0.74	0.80	0.77	0.74	0.72			
		2	0.95	0.90	0.86	0.94	0.89	0.85	0.82	0.88	0.84	0.81	0.86	0.83	0.80	0.78			
		2.5	0.98	0.94	0.90	0.97	0.93	0.89	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.82			
		3	1.00	0.96	0.92	0.98	0.95	0.92	0.89	0.93	0.90	0.88	0.91	0.89	0.87	0.84			
光源形式 -		4	1.02	0.99	0.96	1.00	0.98	0.95	0.93	0.96	0.93	0.91	0.94	0.92	0.90	0.88			
		5	1.03	1.01	0.98	1.02	1.00	0.98	0.96	0.98	0.96	0.94	0.96	0.94	0.93	0.90			
器具光束 19,800 lm		7	1.05	1.03	1.02	1.04	1.02	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.96	0.94			
		10	1.07	1.06	1.05	1.05	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.96			
器具効率 Ft= 100%			単位照度分布(初期値)																
上方光束 Fu= 0%																			
下方光束 Fd= 100%																			
最大取付間隔																			
A-A 1.20 H																			
B-B 1.22 H																			
保守率	良	0.83	A← 水平距離(m) →B																
	中	0.81																	
	否	0.76																	
光度 (cd/1000 lm)			配光曲線 (cd/1000 lm)																
	A-0	B-B	C-0	A'-0	C'-0														
0	497	497	497			A — A - - - B - · - C-C'													
10	498	496	496																
20	472	470	471																
30	405	406	407																
40	299	298	301																
50	193	192	196																
60	90	89	82																
70	36	35	30																
80	8	9	7																
90																			
100																			
110																			
120																			
130																			
140																			
150																			
160																			
170																			
180																			