
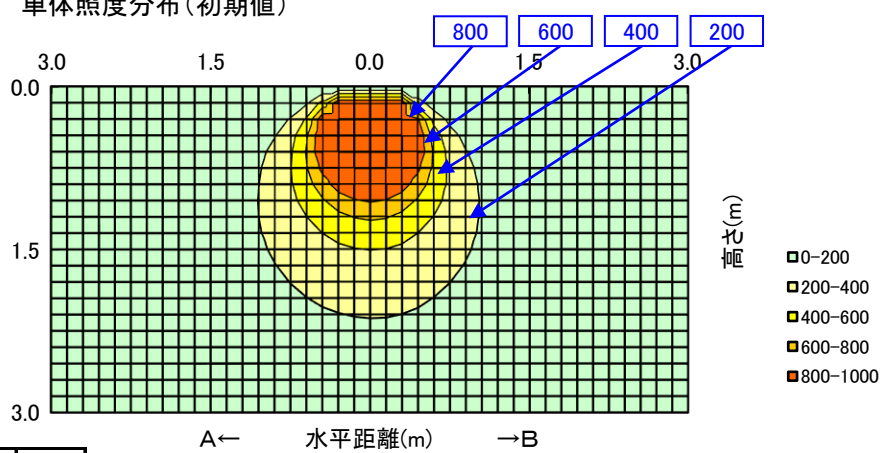
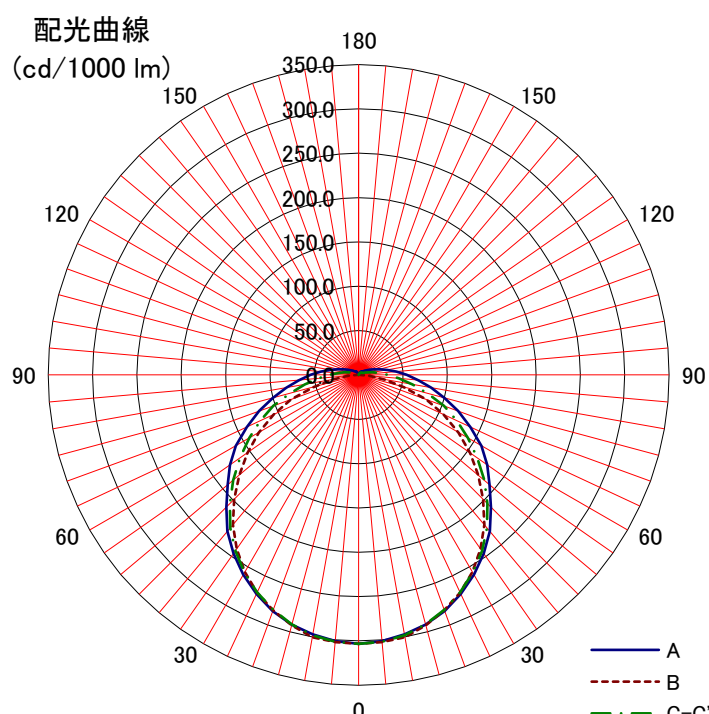


日立照明器具 照明特性

名称: 交換形LED逆富士形	天井	反射率	80%			70%				50%			30%			0%			
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
																		床	
形式: WGN4B			10%																0%
	室指数	固有照明率 S/H=1.0																	
<備考> 防湿・防雨形 (オイルミスト対応)	0.6	0.56	0.44	0.36	0.54	0.43	0.35	0.30	0.41	0.35	0.30	0.40	0.34	0.29	0.27				
	0.8	0.65	0.53	0.45	0.63	0.52	0.45	0.39	0.51	0.44	0.39	0.49	0.43	0.38	0.35				
姿図 	1	0.71	0.60	0.52	0.69	0.59	0.52	0.46	0.57	0.50	0.45	0.55	0.49	0.44	0.42				
	1.25	0.77	0.67	0.59	0.75	0.66	0.59	0.53	0.63	0.57	0.52	0.61	0.55	0.51	0.48				
	1.5	0.81	0.72	0.65	0.79	0.71	0.64	0.59	0.68	0.62	0.57	0.66	0.61	0.56	0.53				
	2	0.87	0.79	0.73	0.85	0.78	0.72	0.67	0.75	0.70	0.65	0.72	0.68	0.64	0.60				
	2.5	0.91	0.84	0.78	0.88	0.82	0.77	0.72	0.79	0.74	0.70	0.76	0.72	0.69	0.65				
	3	0.93	0.87	0.82	0.91	0.85	0.80	0.76	0.82	0.78	0.74	0.79	0.75	0.72	0.69				
光源形式 WGE403NF-N14A	4	0.96	0.91	0.87	0.94	0.89	0.85	0.82	0.86	0.83	0.80	0.83	0.80	0.77	0.74				
	5	0.98	0.94	0.90	0.96	0.92	0.89	0.86	0.89	0.86	0.83	0.86	0.83	0.81	0.77				
器具光束 3,000 lm	7	1.01	0.98	0.95	0.99	0.96	0.93	0.91	0.93	0.90	0.88	0.89	0.88	0.86	0.82				
	10	1.03	1.01	0.99	1.01	0.99	0.97	0.95	0.96	0.94	0.92	0.92	0.91	0.90	0.86				
器具効率 Ft= 100%		単体照度分布(初期値) 																	
上方光束 Fu= 5.2%																			
下方光束 Fd= 94.8%																			
最大取付間隔																			
A-A 1.28 H																			
B-B 1.26 H																			
保守率	良	0.88																	
	中	0.86																	
	否	0.81																	
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 																	
	A-0 B-B C-0 A'-0 C'-0																		
0	303 303 303																		
10	297 300 298																		
20	283 282 282																		
30	260 257 257																		
40	230 221 225																		
50	193 176 185																		
60	160 130 142																		
70	119 81 102																		
80	83 30 62																		
90	54 1 33																		
100	33 17																		
110	18 7																		
120	11 5																		
130	6 4																		
140	4 3																		
150	4 2																		
160																			
170																			
180																			