
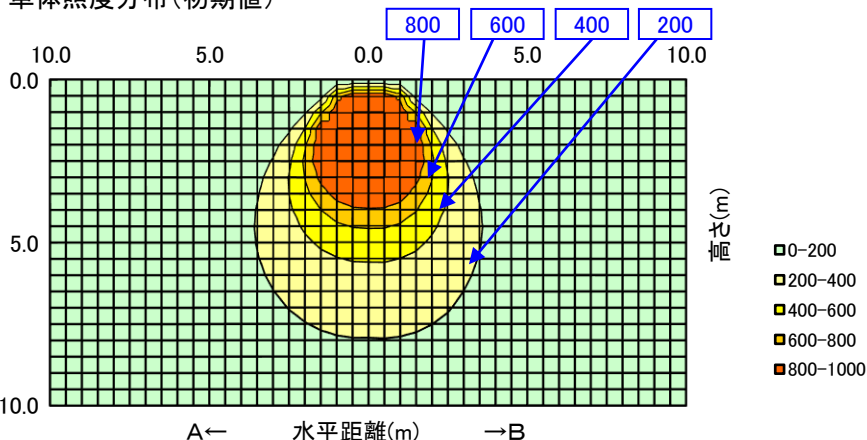
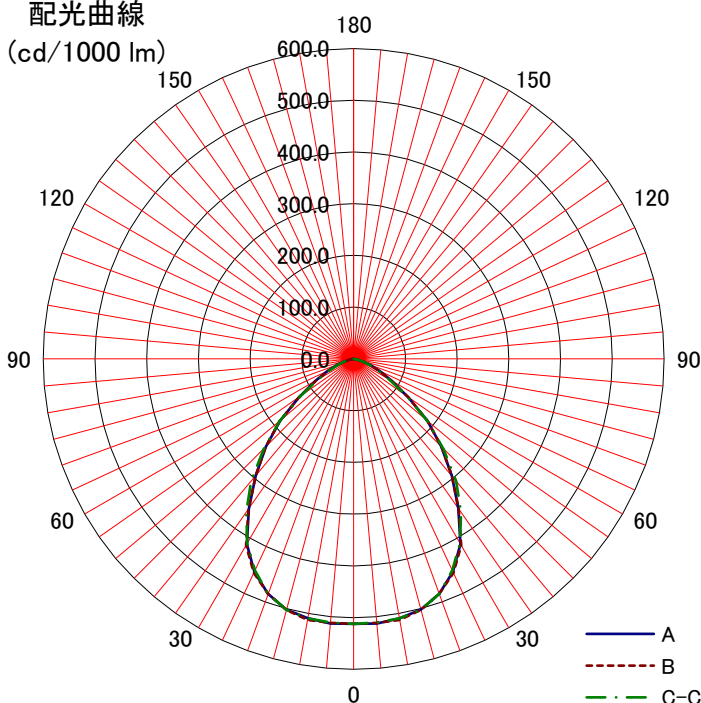


日立照明器具 照明特性

名称: 高天井用LED器具		反射率	天井	80%			70%				50%			30%			0%			
				壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
形式: WHMTE28BMN-J24A		室指数	床	固有照明率 S/H=1.0																
				10%																
<備考>		0.6	0.65	0.55	0.48	0.64	0.54	0.48	0.43	0.53	0.47	0.43	0.52	0.47	0.43	0.41				
		0.8	0.75	0.65	0.59	0.74	0.65	0.59	0.54	0.63	0.58	0.54	0.62	0.57	0.53	0.52				
姿図 		1	0.81	0.72	0.66	0.80	0.72	0.66	0.61	0.70	0.65	0.61	0.69	0.64	0.61	0.59				
		1.25	0.86	0.79	0.73	0.85	0.78	0.72	0.68	0.76	0.71	0.68	0.75	0.71	0.67	0.65				
		1.5	0.90	0.83	0.78	0.89	0.82	0.78	0.74	0.81	0.76	0.73	0.79	0.75	0.72	0.70				
		2	0.95	0.89	0.85	0.93	0.88	0.84	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.77				
		2.5	0.97	0.93	0.89	0.96	0.92	0.88	0.85	0.90	0.87	0.84	0.88	0.85	0.83	0.81				
		3	0.99	0.95	0.92	0.98	0.94	0.91	0.88	0.92	0.89	0.87	0.90	0.88	0.86	0.83				
光源形式 -		4	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.93	0.91	0.89	0.87				
		5	1.03	1.00	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.94	0.95	0.94	0.92	0.90				
器具光束 27,000 lm		7	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.97	0.98	0.97	0.96	0.93				
		10	1.07	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.01	1.00	0.99	0.99	0.96				
器具効率 Ft= 100%		単体照度分布(初期値) 																		
上方光束 Fu= 0%																				
下方光束 Fd= 100%																				
最大取付間隔																				
A-A 1.22 H																				
B-B 1.22 H																				
保守率	良	0.83																		
	中	0.81																		
	否	0.76																		
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 																		
A-0	B-B																C-0	A'-0	C'-0	
0	512																512	512		
10	509																512	509		
20	483																483	483		
30	413																416	411		
40	295																295	308		
50	186																187	187		
60	85																83	78		
70	33																32	29		
80	7																9	7		
90																				
100																				
110																				
120																				
130																				
140																				
150																				
160																				
170																				
180																				