
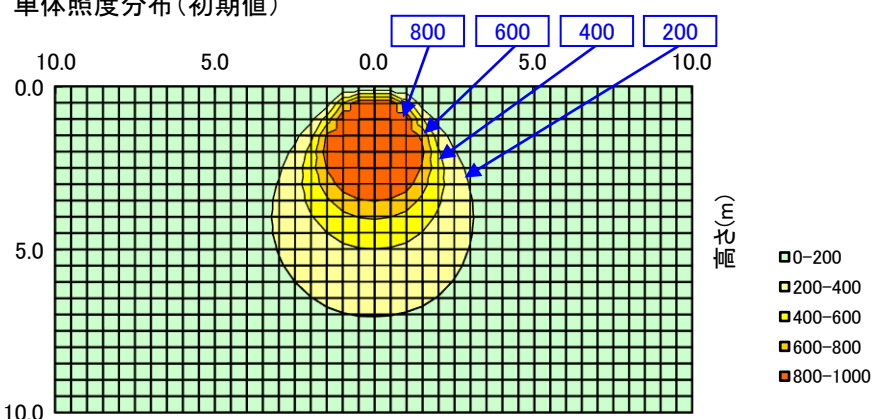
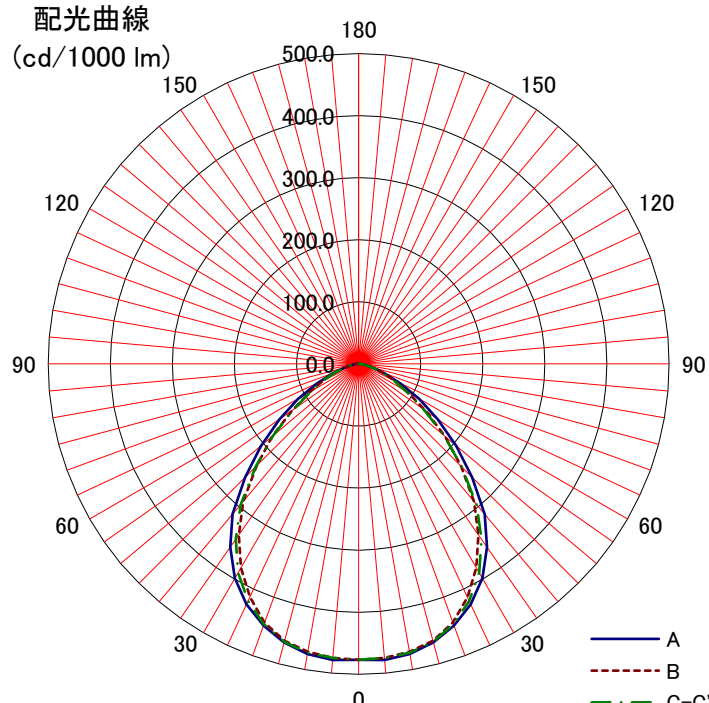


日立照明器具 照明特性

名称: 高天井用LED器具	反射率	天井	80%			70%				50%			30%			0%			
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
		床	10%														0%		
形式: WSMTE22AMN-J14A	室指数	固有照明率 S/H=1.0																	
<備考> 配光角(広角)	0.6	0.65	0.54	0.48	0.64	0.54	0.48	0.43	0.53	0.47	0.43	0.52	0.47	0.43	0.41				
	0.8	0.74	0.65	0.58	0.73	0.64	0.58	0.54	0.63	0.57	0.53	0.62	0.57	0.53	0.51				
姿図 	1	0.80	0.72	0.66	0.79	0.71	0.65	0.61	0.70	0.64	0.60	0.68	0.64	0.60	0.58				
	1.25	0.86	0.78	0.72	0.84	0.77	0.72	0.67	0.76	0.71	0.67	0.74	0.70	0.67	0.65				
	1.5	0.89	0.83	0.77	0.88	0.82	0.77	0.73	0.80	0.76	0.72	0.78	0.75	0.72	0.70				
	2	0.94	0.89	0.84	0.93	0.88	0.83	0.80	0.86	0.82	0.79	0.84	0.81	0.78	0.76				
	2.5	0.97	0.92	0.88	0.95	0.91	0.87	0.84	0.89	0.86	0.83	0.87	0.85	0.82	0.80				
	3	0.98	0.94	0.91	0.97	0.93	0.90	0.87	0.91	0.88	0.86	0.89	0.87	0.85	0.82				
光源形式 -	4	1.01	0.97	0.94	0.99	0.96	0.94	0.91	0.94	0.92	0.90	0.92	0.90	0.89	0.86				
	5	1.02	1.00	0.97	1.01	0.98	0.96	0.94	0.96	0.94	0.93	0.94	0.93	0.91	0.89				
器具光束 20,900 lm	7	1.04	1.02	1.01	1.03	1.01	1.00	0.98	0.99	0.98	0.97	0.97	0.96	0.95	0.92				
	10	1.06	1.05	1.03	1.04	1.03	1.02	1.01	1.01	1.00	1.00	0.99	0.99	0.98	0.95				
器具効率 Ft= 100%		単体照度分布(初期値) 																	
上方光束 Fu= 0%																			
下方光束 Fd= 100%																			
最大取付間隔																			
A-A 1.24 H																			
B-B 1.20 H																			
保守率	良	0.81	配光曲線 (cd/1000 lm) 																
	中	0.79																	
	否	0.75																	
光度 (cd/1000 lm)																			
	A-0	B-B														C-0	A'-0	C'-0	
0	477	477														477			
10	475	471														473			
20	448	443														446			
30	398	379														388			
40	316	289														296			
50	205	181	180																
60	112	92	89																
70	44	41	39																
80	12	11	11																
90	2	1	2																
100																			
110																			
120																			
130																			
140																			
150																			
160																			
170																			
180																			