
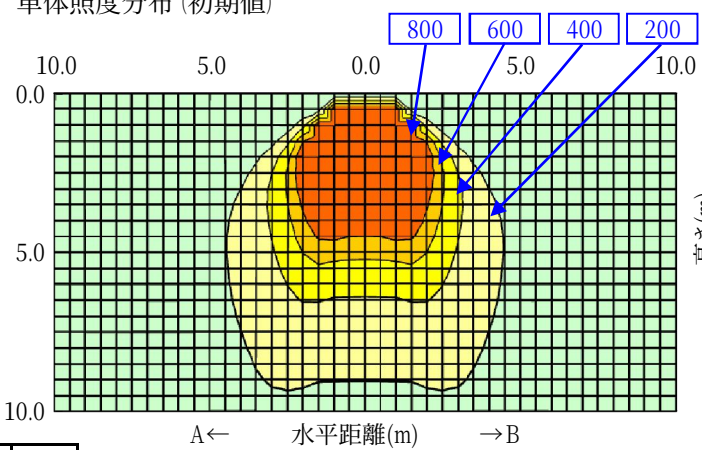
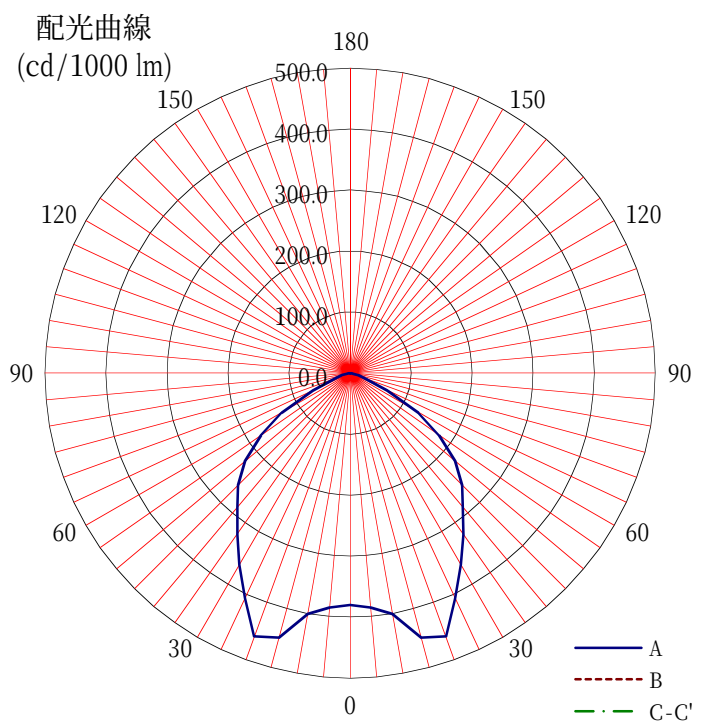


日立照明器具 照明特性

名称: 高天井LED器具		反射率	天井	80%			70%				50%			30%			0%						
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%						
			床	10%															0%				
形式: MTE4401MN(A)		室指数	照明率 S/H=1.0																				
<備考> メタルハライドランプ1000クラス (ビームの開き角:90°)		0.6	0.64	0.53	0.46	0.63	0.53	0.46	0.41	0.52	0.46	0.41	0.51	0.45	0.41	0.39							
		0.8	0.74	0.64	0.57	0.72	0.63	0.57	0.52	0.62	0.56	0.52	0.61	0.56	0.52	0.50							
姿図 		1	0.80	0.71	0.65	0.79	0.71	0.64	0.60	0.69	0.64	0.60	0.68	0.63	0.59	0.57							
		1.25	0.86	0.78	0.72	0.84	0.77	0.71	0.67	0.75	0.71	0.67	0.74	0.70	0.66	0.64							
		1.5	0.90	0.83	0.77	0.88	0.82	0.77	0.73	0.80	0.76	0.72	0.79	0.75	0.72	0.70							
		2	0.95	0.89	0.85	0.93	0.88	0.84	0.80	0.86	0.83	0.80	0.85	0.81	0.79	0.77							
		2.5	0.97	0.93	0.89	0.96	0.92	0.88	0.85	0.90	0.87	0.84	0.88	0.85	0.83	0.81							
		3	0.99	0.95	0.91	0.98	0.94	0.91	0.88	0.92	0.89	0.87	0.90	0.88	0.86	0.83							
		4	1.01	0.98	0.95	1.00	0.97	0.94	0.92	0.95	0.93	0.91	0.93	0.91	0.89	0.87							
光源		5	1.03	1.00	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.94	0.95	0.94	0.92	0.90							
品名	LED	7	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.97	0.98	0.97	0.96	0.93							
形式	-	10	1.07	1.05	1.04	1.05	1.04	1.03	1.02	1.02	1.01	1.00	1.00	0.99	0.99	0.96							
光束	43,000 lm																						
器具効率 Ft= 100.0%			単体照度分布 (初期値) 																				
上方光束 Fu= 0.0%																							
下方光束 Fd= 100.0%																							
			最大取付間隔 A-A 1.36 H B-B H 保守率 <table><tr><td>良</td><td>0.81</td></tr><tr><td>中</td><td>0.79</td></tr><tr><td>否</td><td>0.75</td></tr></table>															良	0.81	中	0.79	否	0.75
良	0.81																						
中	0.79																						
否	0.75																						
光度 (cd/1000 lm)			配光曲線 (cd/1000 lm) 																				
	A-0	B-B																C-0	A'-0	C'-0			
0	380																						
10	401																						
20	459																						
30	363																						
40	287																						
50	225																						
60	130																						
70	26																						
80	5																						
90																							
100																							
110																							
120																							
130																							
140																							
150																							
160																							
170																							
180																							