

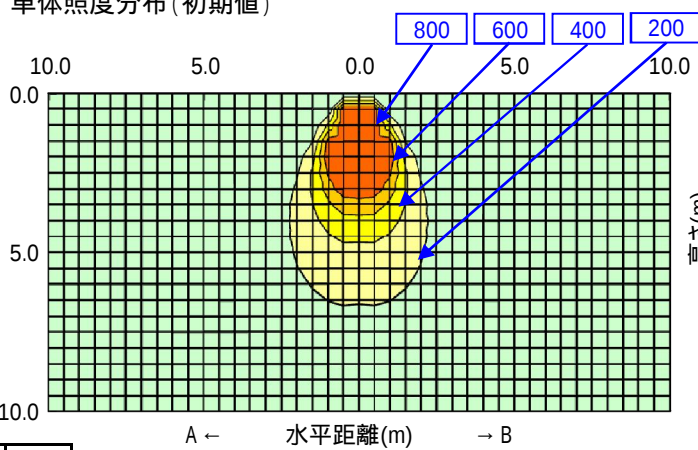
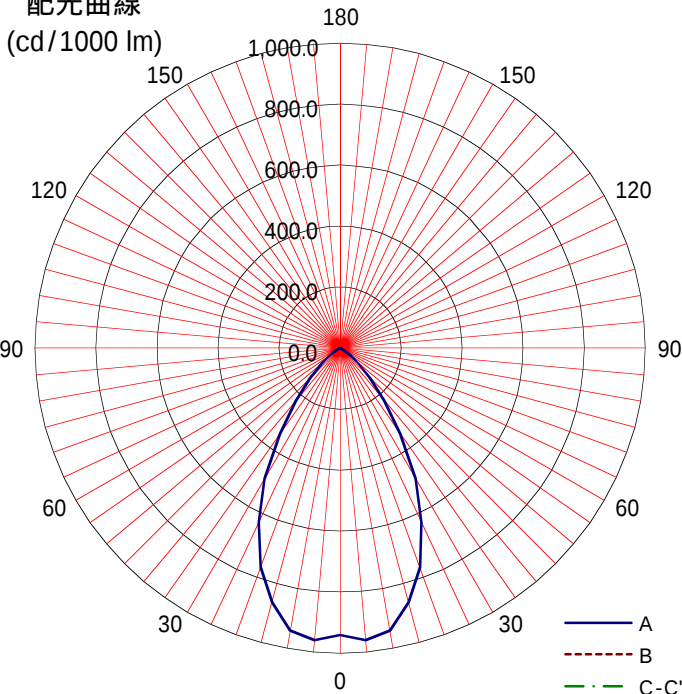


日立照明器具 照明特性

名称: 高天井LED器具		天井	80%			70%				50%			30%			0%					
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%				
形式: MVE0903NN(A)		反射率	床	10%															0%		
				照明率 S/H=1.0																	
<備考> 水銀ランプ250ワツス (ビームの開き角:60°)		室指数	0.6	0.80	0.73	0.69	0.79	0.73	0.68	0.65	0.72	0.68	0.65	0.71	0.68	0.65	0.64				
			0.8	0.87	0.81	0.77	0.86	0.81	0.77	0.74	0.80	0.76	0.74	0.79	0.76	0.73	0.72				
姿図 		光源	1	0.92	0.86	0.82	0.91	0.86	0.82	0.79	0.84	0.81	0.79	0.83	0.81	0.78	0.77				
			1.25	0.95	0.90	0.87	0.94	0.90	0.86	0.84	0.88	0.85	0.83	0.87	0.85	0.83	0.81				
			1.5	0.98	0.93	0.90	0.97	0.93	0.90	0.87	0.91	0.89	0.87	0.90	0.88	0.86	0.84				
			2	1.01	0.97	0.94	0.99	0.96	0.94	0.92	0.95	0.93	0.91	0.93	0.92	0.90	0.88				
			2.5	1.02	0.99	0.97	1.01	0.98	0.96	0.94	0.97	0.95	0.93	0.95	0.94	0.92	0.90				
			3	1.03	1.00	0.98	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.95	0.93	0.91				
			4	1.04	1.02	1.00	1.03	1.01	1.00	0.98	0.99	0.98	0.97	0.98	0.97	0.95	0.93				
品名: LED		形式: -	光束: 9,300 lm	5	1.05	1.04	1.02	1.04	1.03	1.01	1.00	1.01	1.00	0.99	0.99	0.98	0.97	0.95			
				7	1.07	1.06	1.04	1.05	1.04	1.04	1.03	1.02	1.02	1.01	1.01	1.00	0.99	0.97			
				10	1.08	1.07	1.06	1.07	1.06	1.05	1.05	1.04	1.03	1.03	1.02	1.02	1.01	0.99			
器具効率 Ft= 100.0%				単体照度分布 (初期値) 																	
上方光束 Fu= 0.0%																					
下方光束 Fd= 100.0%																					
最大取付間隔				配光曲線 																	
A-A 0.94 H																					
B-B H																					
保守率	良	0.81																			
	中	0.79																			
	否	0.75																			
光度 (cd/1000 lm)				配光曲線 																	
	A-0	B-B	C-0																	A'-0	C'-0
0	941																				
10	940																				
20	764																				
30	496																				
40	225																				
50	77																				
60	17																				
70	5																				
80	2																				
90																					
100																					
110																					
120																					
130																					
140																					
150																					
160																					
170																					
180																					

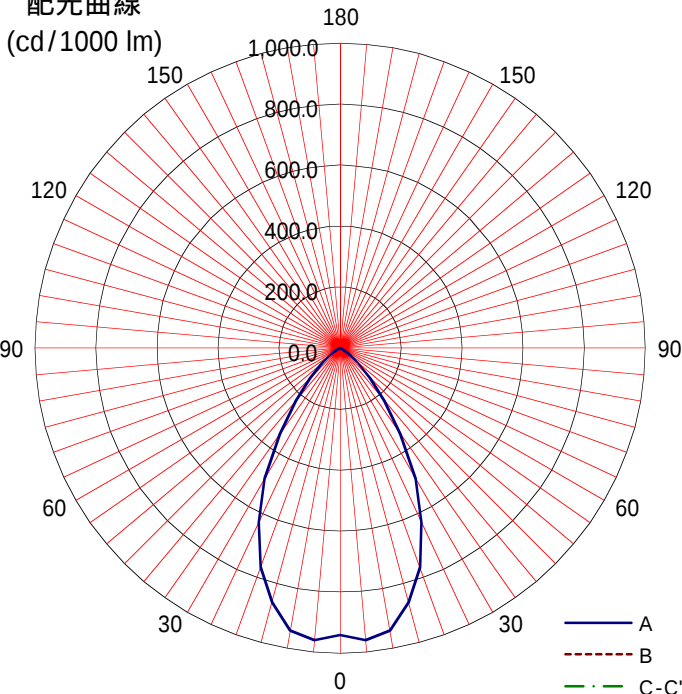