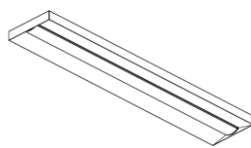
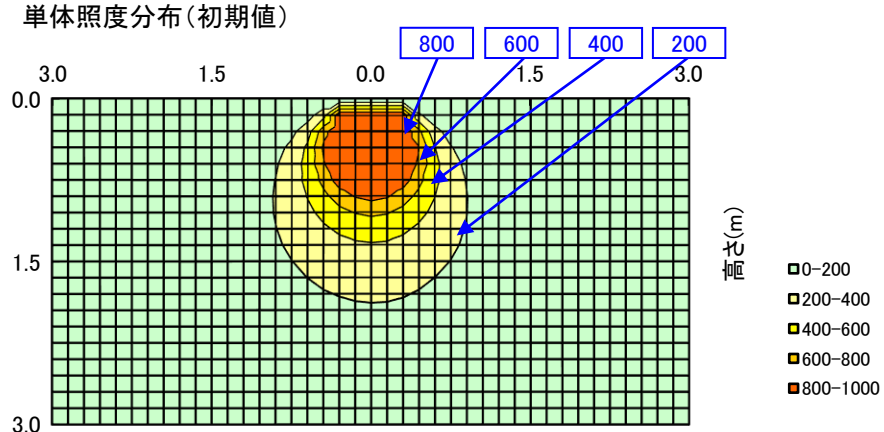
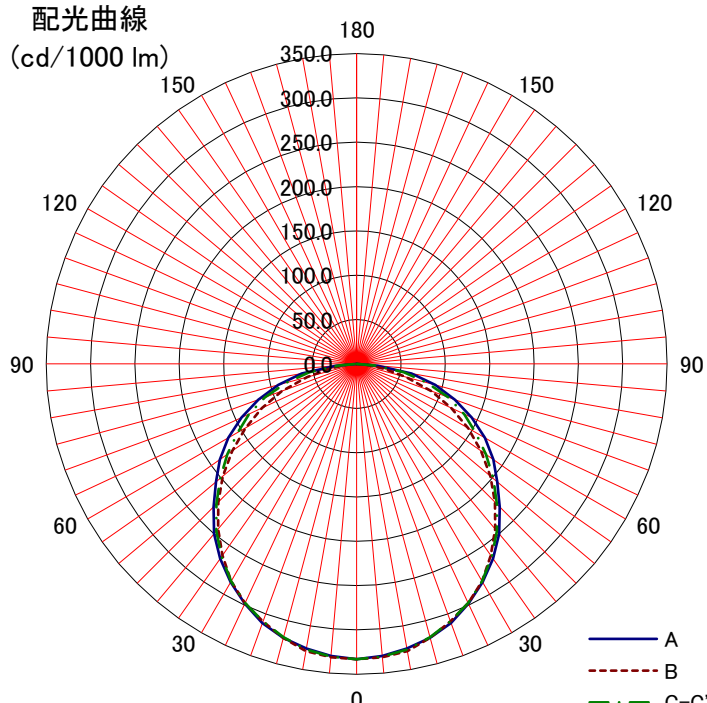


日立照明器具 照明特性

名称: 交換形LED下面開放形	天井	反射率	80%			70%				50%			30%			0%			
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
			床	10%														0%	
形式: NC4C1		室指数	固有照明率 S/H=1.0																
〈備考〉		0.6	0.57	0.45	0.37	0.56	0.45	0.37	0.32	0.43	0.37	0.32	0.42	0.36	0.32	0.30			
		0.8	0.67	0.55	0.47	0.65	0.54	0.47	0.41	0.53	0.46	0.41	0.52	0.46	0.41	0.39			
姿図 		1	0.73	0.62	0.54	0.71	0.61	0.54	0.48	0.60	0.53	0.48	0.58	0.52	0.48	0.45			
		1.25	0.79	0.69	0.62	0.77	0.68	0.61	0.56	0.66	0.60	0.55	0.65	0.59	0.55	0.52			
		1.5	0.83	0.74	0.67	0.82	0.73	0.67	0.62	0.71	0.66	0.61	0.70	0.65	0.60	0.58			
		2	0.89	0.82	0.75	0.87	0.80	0.75	0.70	0.78	0.73	0.69	0.76	0.72	0.68	0.66			
		2.5	0.92	0.86	0.81	0.91	0.85	0.80	0.75	0.83	0.78	0.74	0.81	0.77	0.74	0.71			
		3	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.78	0.84	0.80	0.77	0.75			
		4	0.98	0.93	0.89	0.96	0.92	0.88	0.85	0.90	0.87	0.84	0.88	0.85	0.83	0.80			
光源形式 CE402WE-N14A		5	1.00	0.96	0.93	0.98	0.95	0.92	0.89	0.93	0.90	0.88	0.91	0.88	0.86	0.83			
器具光束 2,120 lm		7	1.02	1.00	0.97	1.01	0.99	0.96	0.94	0.96	0.94	0.92	0.94	0.92	0.91	0.88			
		10	1.04	1.02	1.01	1.03	1.01	1.00	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.92			
器具効率 Ft= 100%			<div>単体照度分布 (初期値)</div> 																
上方光束 Fu= 0%																			
下方光束 Fd= 100%																			
最大取付間隔																			
A-A		1.28	H																
B-B		1.26	H																
保守率	良	0.86																	
	中	0.81																	
	否	0.72																	
光度 (cd/1000 lm)			<div>配光曲線 (cd/1000 lm)</div> 																
	A-0	B-B															C-0	A'-0	C'-0
0	333	333															333		
10	326	329															327		
20	311	309	309																
30	284	283	283																
40	250	243	246																
50	207	197	201																
60	167	145	155																
70	118	90	110																
80	63	32	54																
90																			
100																			
110																			
120																			
130																			
140																			
150																			
160																			
170																			
180																			