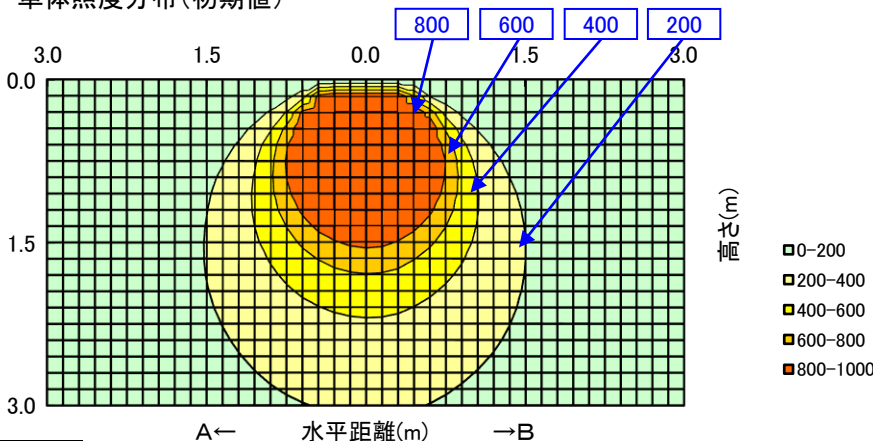
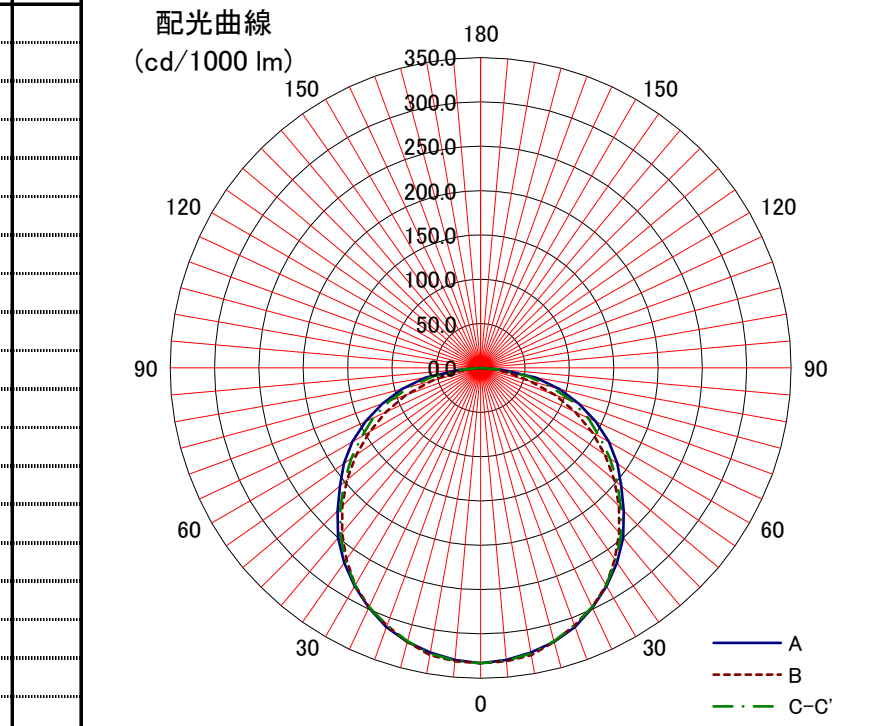


日立照明器具 照明特性

名称: 交換形LED下面開放形	天井	80%			70%				50%			30%			0%												
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%											
			床	10%													0%										
形式: NC4C1	反射率	固有照明率 S/H=1.0																									
室指数	0.6	0.57	0.45	0.37	0.56	0.45	0.37	0.32	0.43	0.37	0.32	0.42	0.36	0.32	0.30												
	0.8	0.67	0.55	0.47	0.65	0.54	0.47	0.41	0.53	0.46	0.41	0.52	0.46	0.41	0.39												
姿図	1	0.73	0.62	0.54	0.71	0.61	0.54	0.48	0.60	0.53	0.48	0.58	0.52	0.48	0.45												
	1.25	0.79	0.69	0.62	0.77	0.68	0.61	0.56	0.66	0.60	0.55	0.65	0.59	0.55	0.52												
	1.5	0.83	0.74	0.67	0.82	0.73	0.67	0.62	0.71	0.66	0.61	0.70	0.65	0.60	0.58												
	2	0.89	0.82	0.75	0.87	0.80	0.75	0.70	0.78	0.73	0.69	0.76	0.72	0.68	0.66												
	2.5	0.92	0.86	0.81	0.91	0.85	0.80	0.75	0.83	0.78	0.74	0.81	0.77	0.74	0.71												
	3	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.78	0.84	0.80	0.77	0.75												
光源形式	4	0.98	0.93	0.89	0.96	0.92	0.88	0.85	0.90	0.87	0.84	0.88	0.85	0.83	0.80												
CE406WE-N14A	5	1.00	0.96	0.93	0.98	0.95	0.92	0.89	0.93	0.90	0.88	0.91	0.88	0.86	0.83												
器具光束	7	1.02	1.00	0.97	1.01	0.99	0.96	0.94	0.96	0.94	0.92	0.94	0.92	0.91	0.88												
5,780 lm	10	1.04	1.02	1.01	1.03	1.01	1.00	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.92												
器具効率 Ft= 100%		<div>単体照度分布(初期値)</div> 																									
上方光束 Fu= 0%																											
下方光束 Fd= 100%																											
最大取付間隔		<div>配光曲線</div> <div>(cd/1000 lm)</div> 																									
A-A 1.28 H																											
B-B 1.26 H																											
保守率	良	0.86	<div>配光曲線</div> <div>(cd/1000 lm)</div>																								
	中	0.81																									
	否	0.72																									
光度 (cd/1000 lm)		<div>配光曲線</div> <div>(cd/1000 lm)</div>																									
A-0 B-B C-0 A'-0 C'-0																											
0	333															333	333										
10	326															329	327										
20	311															309	309										
30	284															283	283										
40	250															243	246										
50	207															197	201										
60	167															145	155										
70	118															90	110										
80	63															32	54										
90																											
100																											
110																											
120																											
130																											
140																											
150																											
160																											
170																											
180																											