
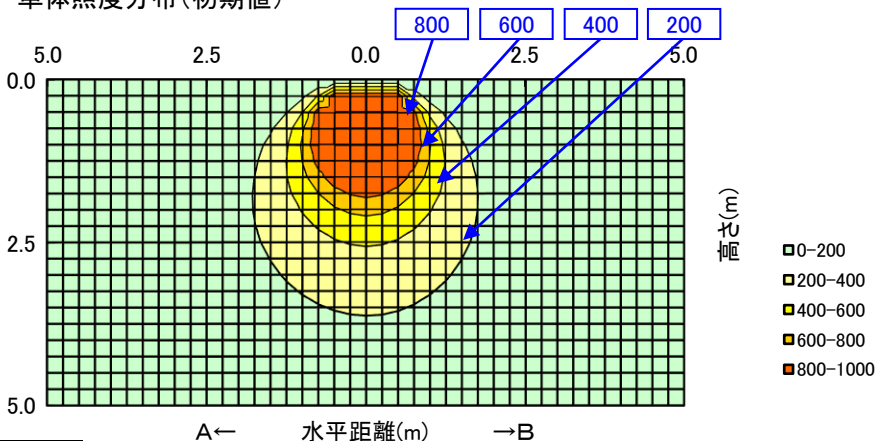
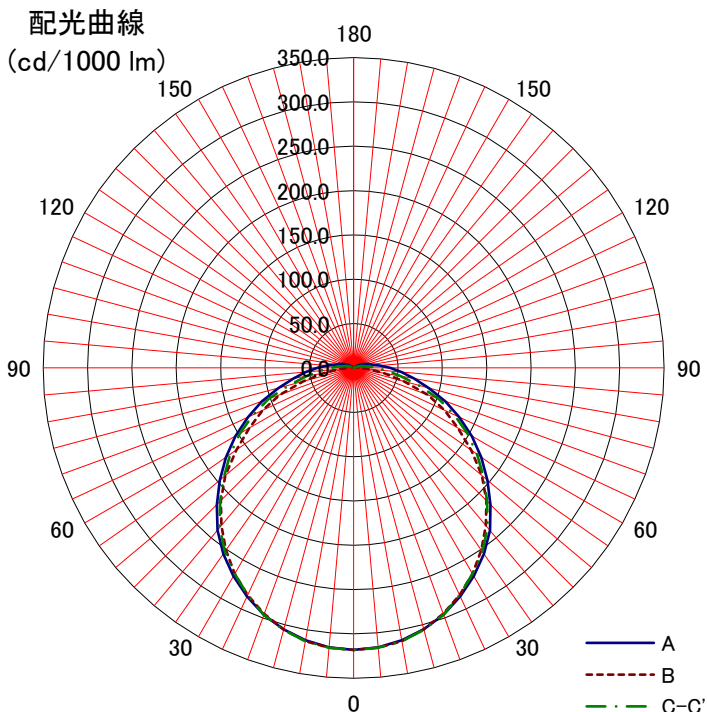


# 日立照明器具 照明特性

名称: 交換形LED逆富士形	反射率	天井	80%			70%				50%			30%			0%									
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%									
		床	10%														0%								
形式: NC8A	室指数	固有照明率 S/H=1.0																							
〈備考〉	0.6	0.57	0.45	0.37	0.55	0.44	0.36	0.31	0.42	0.36	0.31	0.41	0.35	0.31	0.28										
	0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.52	0.45	0.40	0.50	0.44	0.39	0.37										
姿図 	1	0.72	0.61	0.53	0.70	0.60	0.53	0.47	0.58	0.52	0.47	0.56	0.51	0.46	0.43										
	1.25	0.78	0.68	0.61	0.76	0.67	0.60	0.54	0.65	0.58	0.53	0.63	0.57	0.53	0.50										
	1.5	0.82	0.73	0.66	0.81	0.72	0.65	0.60	0.70	0.64	0.59	0.67	0.62	0.58	0.55										
	2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.74	0.70	0.66	0.63										
	2.5	0.92	0.85	0.79	0.90	0.83	0.78	0.74	0.81	0.76	0.72	0.78	0.74	0.71	0.68										
	3	0.94	0.88	0.83	0.92	0.86	0.82	0.78	0.84	0.80	0.76	0.81	0.77	0.74	0.71										
光源形式	4	0.97	0.92	0.88	0.95	0.91	0.87	0.83	0.88	0.84	0.81	0.85	0.82	0.80	0.76										
CE808LE-N14A	5	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.91	0.88	0.85	0.88	0.85	0.83	0.80										
器具光束	7	1.02	0.99	0.96	1.00	0.97	0.95	0.92	0.94	0.92	0.90	0.91	0.90	0.88	0.84										
8,250 lm	10	1.04	1.02	1.00	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.93	0.92	0.88										
器具効率 Ft= 100%		単体照度分布(初期値) 																							
上方光束 Fu= 3.5%																									
下方光束 Fd= 96.5%																									
最大取付間隔		A-A	1.28	H																					
		B-B	1.26	H																					
保守率	良	0.88																							
	中	0.86																							
	否	0.81																							
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 																							
	A-0															B-B	C-0	A'-0	C'-0						
0	318	318	318																						
10	312	313	313																						
20	296	295	296																						
30	271	268	268																						
40	239	232	235																						
50	197	189	191																						
60	154	136	148																						
70	110	89	102																						
80	69	35	54																						
90	41	5	25																						
100	21	5	12																						
110	13	3	6																						
120	5	2	1																						
130																									
140																									
150																									
160																									
170																									
180																									