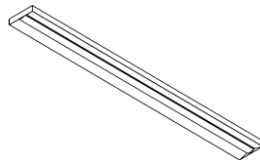
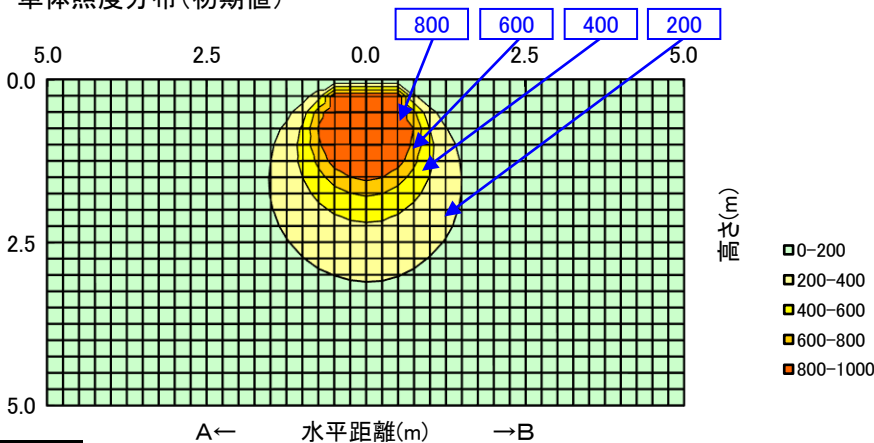
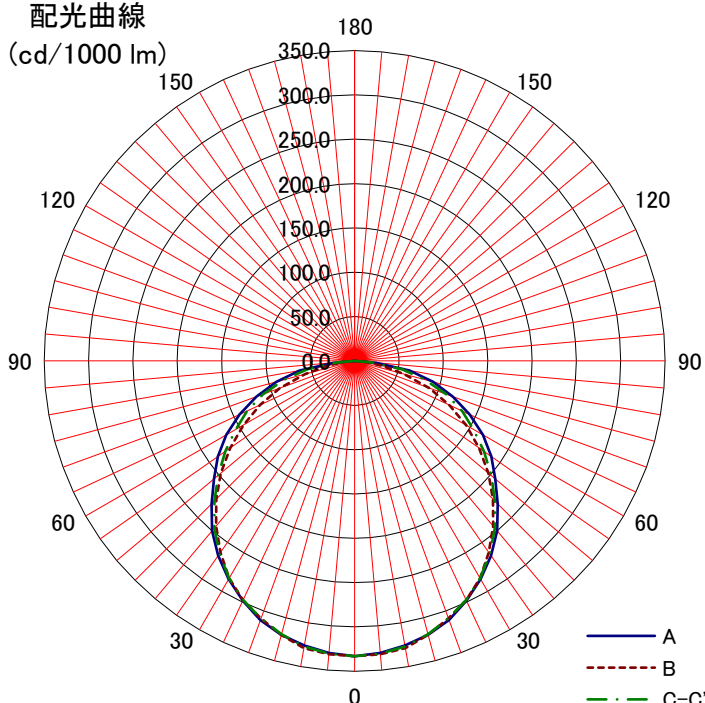


日立照明器具 照明特性

名称: 交換形LED下面開放形		天井 壁 床	80%			70%				50%			30%			0%	
			70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			10%														
形式: NC8C		室指数	固有照明率 S/H=1.0														
〈備考〉		0.6	0.57	0.45	0.37	0.56	0.45	0.37	0.32	0.43	0.37	0.32	0.42	0.36	0.32	0.30	
		0.8	0.67	0.55	0.47	0.65	0.54	0.47	0.41	0.53	0.46	0.41	0.52	0.46	0.41	0.39	
<div>姿図</div> <div></div>		1	0.73	0.62	0.54	0.71	0.61	0.54	0.48	0.60	0.53	0.48	0.58	0.52	0.48	0.45	
		1.25	0.79	0.69	0.62	0.77	0.68	0.61	0.56	0.66	0.60	0.55	0.65	0.59	0.55	0.52	
		1.5	0.83	0.74	0.67	0.82	0.73	0.67	0.62	0.71	0.66	0.61	0.70	0.65	0.60	0.58	
		2	0.89	0.82	0.75	0.87	0.80	0.75	0.70	0.78	0.73	0.69	0.76	0.72	0.68	0.66	
		2.5	0.92	0.86	0.81	0.91	0.85	0.80	0.75	0.83	0.78	0.74	0.81	0.77	0.74	0.71	
		3	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.78	0.84	0.80	0.77	0.75	
光源形式		4	0.98	0.93	0.89	0.96	0.92	0.88	0.85	0.90	0.87	0.84	0.88	0.85	0.83	0.80	
CE806WE-X14A		5	1.00	0.96	0.93	0.98	0.95	0.92	0.89	0.93	0.90	0.88	0.91	0.88	0.86	0.83	
器具光束		7	1.02	1.00	0.97	1.01	0.99	0.96	0.94	0.96	0.94	0.92	0.94	0.92	0.91	0.88	
5,780 lm		10	1.04	1.02	1.01	1.03	1.01	1.00	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.92	
器具効率 Ft= 100%		<div>単体照度分布(初期値)</div> <div></div>															
上方光束 Fu= 0%																	
下方光束 Fd= 100%																	
最大取付間隔																	
A-A		1.28	H														
B-B		1.26	H														
保守率	良	0.86															
	中	0.81															
	否	0.72															
光度 (cd/1000 lm)		<div>配光曲線</div> <div>(cd/1000 lm)</div> <div></div>															
	A-0	B-B	C-0	A'-0	C'-0												
	0	333	333	333													
	10	326	329	327													
	20	311	309	309													
	30	284	283	283													
	40	250	243	246													
	50	207	197	201													
	60	167	145	155													
	70	118	90	110													
	80	63	32	54													
	90																
	100																
	110																
	120																
	130																
	140																
	150																
	160																
	170																
	180																