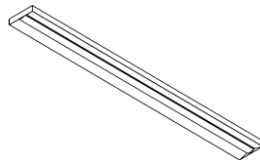
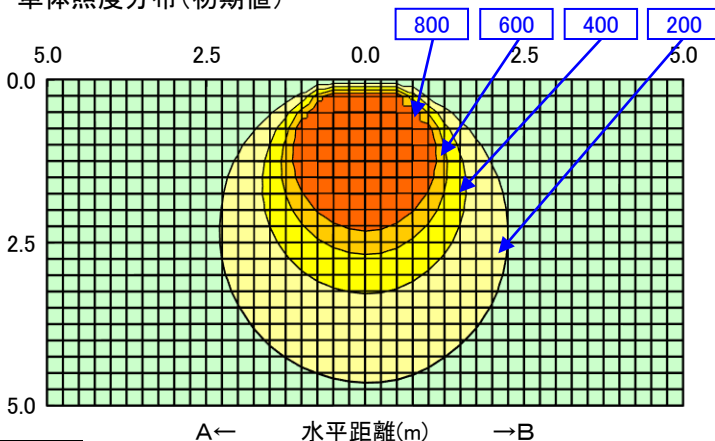
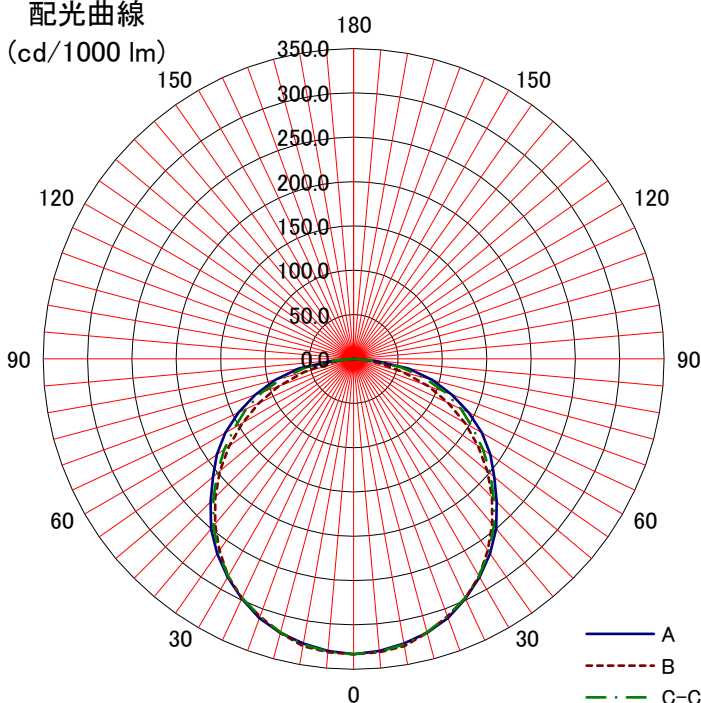


日立照明器具 照明特性

名称: 交換形LED下面開放形	天井	反射率	80%			70%				50%			30%			0%													
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%												
			床	10%													0%												
形式: NC8C	室指数		固有照明率 S/H=1.0																										
<備考>	0.6	0.57	0.45	0.37	0.56	0.45	0.37	0.32	0.43	0.37	0.32	0.42	0.36	0.32	0.30														
	0.8	0.67	0.55	0.47	0.65	0.54	0.47	0.41	0.53	0.46	0.41	0.52	0.46	0.41	0.39														
姿図 	1	0.73	0.62	0.54	0.71	0.61	0.54	0.48	0.60	0.53	0.48	0.58	0.52	0.48	0.45														
	1.25	0.79	0.69	0.62	0.77	0.68	0.61	0.56	0.66	0.60	0.55	0.65	0.59	0.55	0.52														
	1.5	0.83	0.74	0.67	0.82	0.73	0.67	0.62	0.71	0.66	0.61	0.70	0.65	0.60	0.58														
	2	0.89	0.82	0.75	0.87	0.80	0.75	0.70	0.78	0.73	0.69	0.76	0.72	0.68	0.66														
	2.5	0.92	0.86	0.81	0.91	0.85	0.80	0.75	0.83	0.78	0.74	0.81	0.77	0.74	0.71														
	3	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.86	0.82	0.78	0.84	0.80	0.77	0.75														
光源形式 CE814DE-C24A	4	0.98	0.93	0.89	0.96	0.92	0.88	0.85	0.90	0.87	0.84	0.88	0.85	0.83	0.80														
器具光束 12,970 lm	5	1.00	0.96	0.93	0.98	0.95	0.92	0.89	0.93	0.90	0.88	0.91	0.88	0.86	0.83														
	7	1.02	1.00	0.97	1.01	0.99	0.96	0.94	0.96	0.94	0.92	0.94	0.92	0.91	0.88														
	10	1.04	1.02	1.01	1.03	1.01	1.00	0.98	0.99	0.98	0.96	0.97	0.96	0.95	0.92														
器具効率 Ft= 100%		<div>単体照度分布(初期値)</div> 																											
上方光束 Fu= 0%																													
下方光束 Fd= 100%																													
最大取付間隔																													
A-A 1.28 H																													
B-B 1.26 H																													
保守率	良	0.86	<div>配光曲線</div> <div>(cd/1000 lm)</div> 																										
	中	0.81																											
	否	0.72																											
光度 (cd/1000 lm)																													
	A-0	B-B															C-0	A'-0	C'-0										
0	333	333															333												
10	326	329	327																										
20	311	309	309																										
30	284	283	283																										
40	250	243	246																										
50	207	197	201																										
60	167	145	155																										
70	118	90	110																										
80	63	32	54																										
90																													
100																													
110																													
120																													
130																													
140																													
150																													
160																													
170																													
180																													