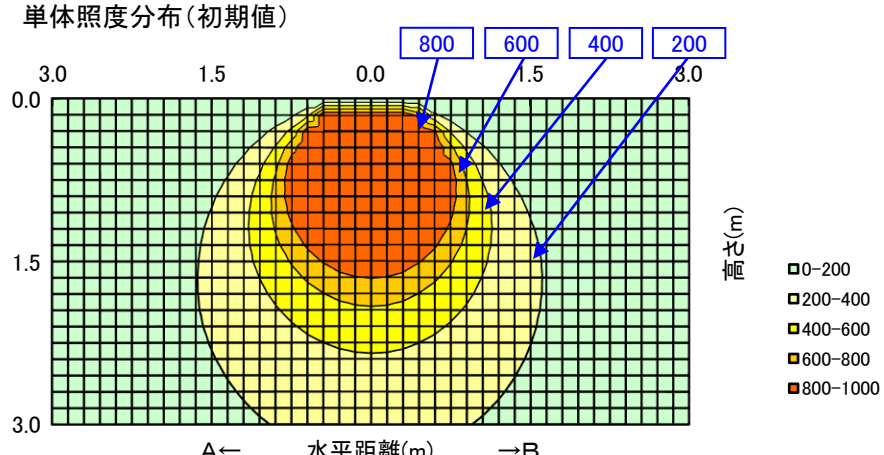
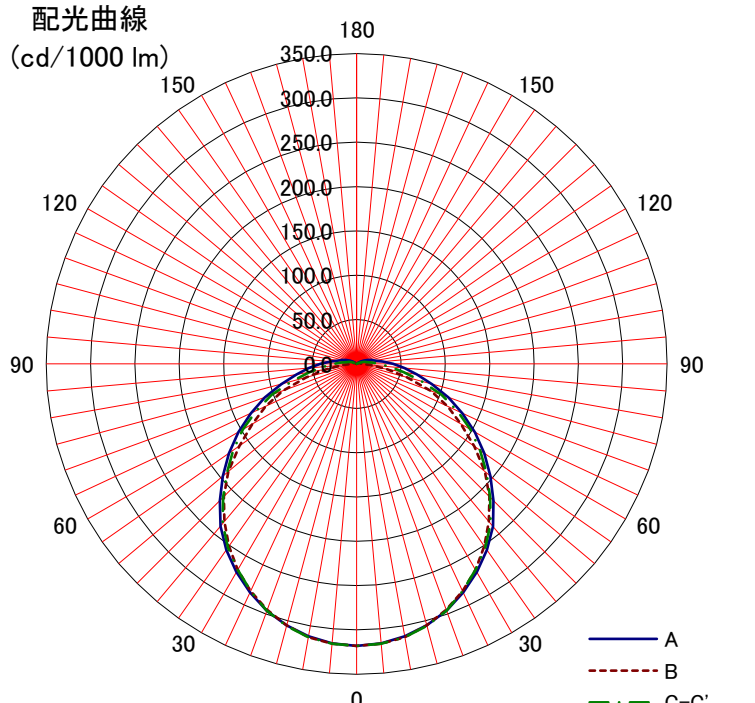


日立照明器具 照明特性

名称: 交換形LEDトラフ形		天井	80%			70%				50%			30%			0%						
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%					
形式: PC4A1		床	10%															0%				
			固有照明率 S/H=1.0																			
<備考>		室指数	0.6	0.57	0.45	0.37	0.55	0.44	0.36	0.31	0.42	0.36	0.31	0.41	0.35	0.31	0.28					
		0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.52	0.45	0.40	0.50	0.44	0.39	0.37						
姿図		1	0.72	0.61	0.53	0.70	0.60	0.53	0.47	0.58	0.52	0.47	0.56	0.51	0.46	0.43						
		1.25	0.78	0.68	0.61	0.76	0.67	0.60	0.54	0.65	0.58	0.53	0.63	0.57	0.53	0.50						
		1.5	0.82	0.73	0.66	0.81	0.72	0.65	0.60	0.70	0.64	0.59	0.67	0.62	0.58	0.55						
		2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.74	0.70	0.66	0.63						
		2.5	0.92	0.85	0.79	0.90	0.83	0.78	0.74	0.81	0.76	0.72	0.78	0.74	0.71	0.68						
		3	0.94	0.88	0.83	0.92	0.86	0.82	0.78	0.84	0.80	0.76	0.81	0.77	0.74	0.71						
光源形式		4	0.97	0.92	0.88	0.95	0.91	0.87	0.83	0.88	0.84	0.81	0.85	0.82	0.80	0.76						
		5	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.91	0.88	0.85	0.88	0.85	0.83	0.80						
器具光束		7	1.02	0.99	0.96	1.00	0.97	0.95	0.92	0.94	0.92	0.90	0.91	0.90	0.88	0.84						
		10	1.04	1.02	1.00	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.93	0.92	0.88						
器具効率 Ft= 100%		単体照度分布(初期値)																				
上方光束 Fu= 3.5%																						
下方光束 Fd= 96.5%																						
最大取付間隔																						
A-A 1.28 H																						
B-B 1.26 H																						
保守率	良	0.88	配光曲線 (cd/1000 lm)																			
	中	0.86																				
	否	0.81																				
光度 (cd/1000 lm)																						
	A-0																		B-B	C-0	A'-0	C'-0
0	318																		318	318		
10	312																		313	313		
20	296																		295	296		
30	271																		268	268		
40	239																		232	235		
50	197																		189	191		
60	154																		136	148		
70	110																		89	102		
80	69																		35	54		
90	41																		5	25		
100	21																		5	12		
110	13																		3	6		
120	5																		2	1		
130																						
140																						
150																						
160																						
170																						
180																						