
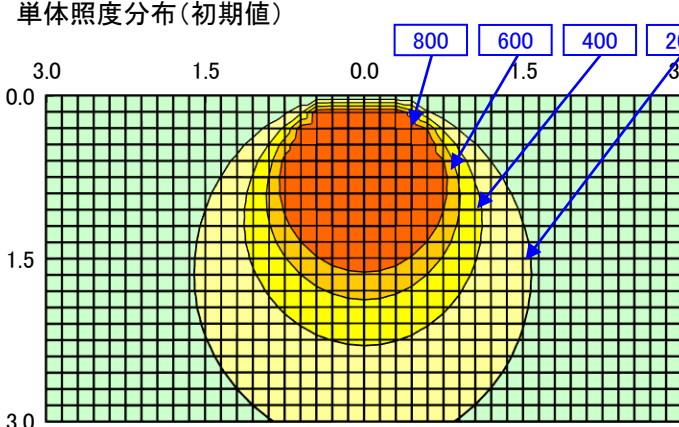
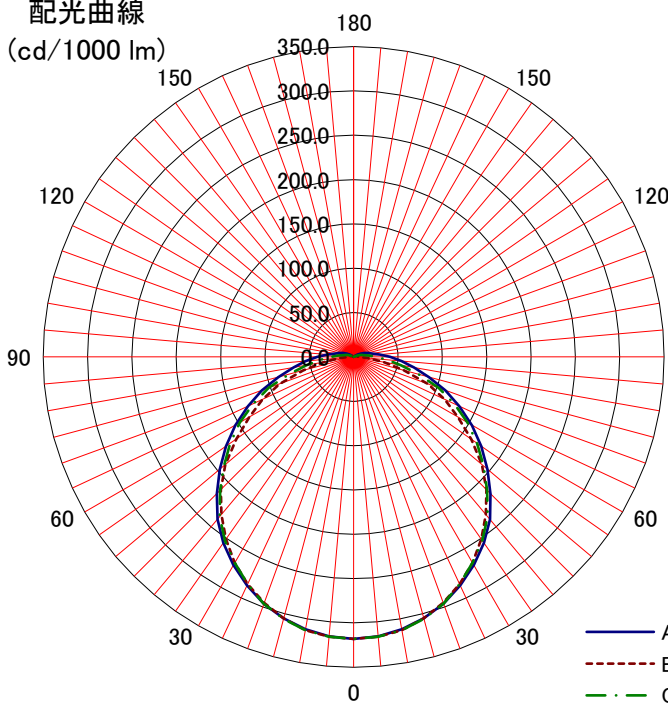


日立照明器具 照明特性

名称: 交換形LEDトラフ形 CP付	天井	80%			70%				50%			30%			0%																
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%															
			床	10%														0%													
形式: PC4A1CP	反射率	固有照明率 S/H=1.0																													
＜備考＞	室指数	0.6	0.57	0.45	0.37	0.55	0.44	0.36	0.31	0.42	0.36	0.31	0.41	0.35	0.31	0.28															
		0.8	0.66	0.54	0.46	0.64	0.53	0.46	0.40	0.52	0.45	0.40	0.50	0.44	0.39	0.37															
姿図 	1	0.72	0.61	0.53	0.70	0.60	0.53	0.47	0.58	0.52	0.47	0.56	0.51	0.46	0.43																
	1.25	0.78	0.68	0.61	0.76	0.67	0.60	0.54	0.65	0.58	0.53	0.63	0.57	0.53	0.50																
	1.5	0.82	0.73	0.66	0.81	0.72	0.65	0.60	0.70	0.64	0.59	0.67	0.62	0.58	0.55																
	2	0.88	0.80	0.74	0.86	0.79	0.73	0.68	0.76	0.71	0.67	0.74	0.70	0.66	0.63																
	2.5	0.92	0.85	0.79	0.90	0.83	0.78	0.74	0.81	0.76	0.72	0.78	0.74	0.71	0.68																
	3	0.94	0.88	0.83	0.92	0.86	0.82	0.78	0.84	0.80	0.76	0.81	0.77	0.74	0.71																
	4	0.97	0.92	0.88	0.95	0.91	0.87	0.83	0.88	0.84	0.81	0.85	0.82	0.80	0.76																
光源形式 CE407DG-C14A	5	0.99	0.95	0.91	0.97	0.94	0.90	0.87	0.91	0.88	0.85	0.88	0.85	0.83	0.80																
器具光束 6,660 lm	7	1.02	0.99	0.96	1.00	0.97	0.95	0.92	0.94	0.92	0.90	0.91	0.90	0.88	0.84																
	10	1.04	1.02	1.00	1.02	1.00	0.98	0.96	0.97	0.95	0.94	0.94	0.93	0.92	0.88																
器具効率 Ft= 100%		<div>単体照度分布 (初期値)</div> 																													
上方光束 Fu= 3.5%																															
下方光束 Fd= 96.5%																															
最大取付間隔		A← 水平距離(m) →B																													
A-A 1.28 H																															
B-B 1.26 H																															
保守率	良	0.88																													
	中																0.86														
	否																														
光度 (cd/1000 lm)		<div>配光曲線 (cd/1000 lm)</div> 																													
	A-0																B-B	C-0	A'-0	C'-0											
0	318																318	318													
10	312																313	313													
20	296																295	296													
30	271																268	268													
40	239																232	235													
50	197																189	191													
60	154																136	148													
70	110																89	102													
80	69																35	54													
90	41																5	25													
100	21																5	12													
110	13																3	6													
120	5																2	1													
130																															
140																															
150																															
160																															
170																															
180																															