
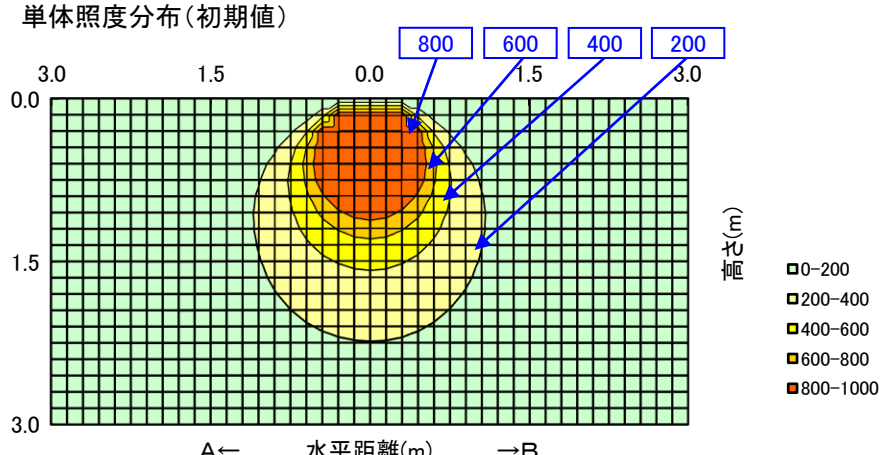
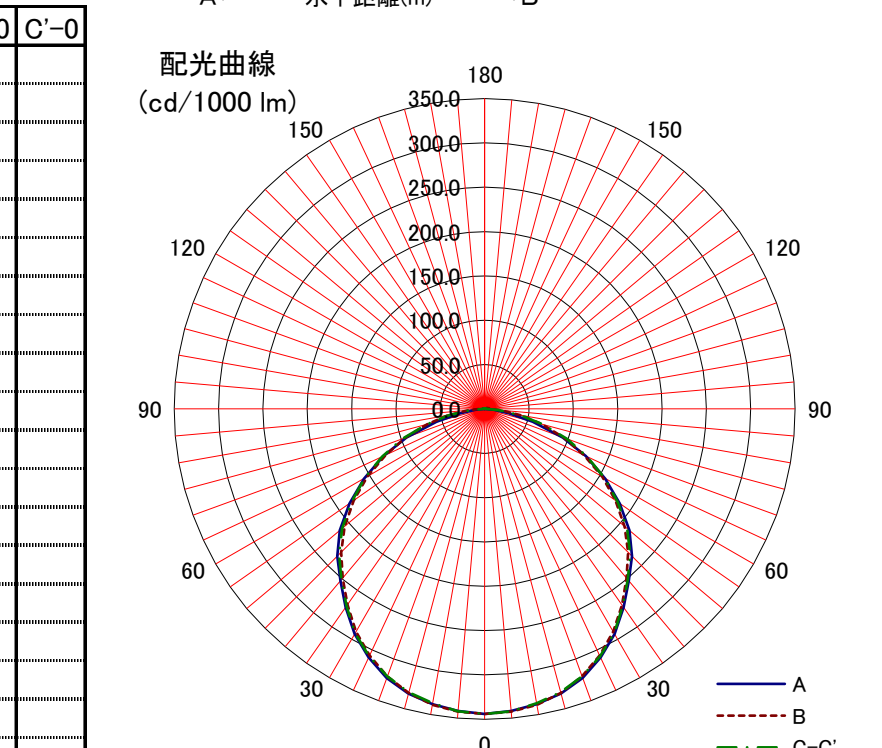
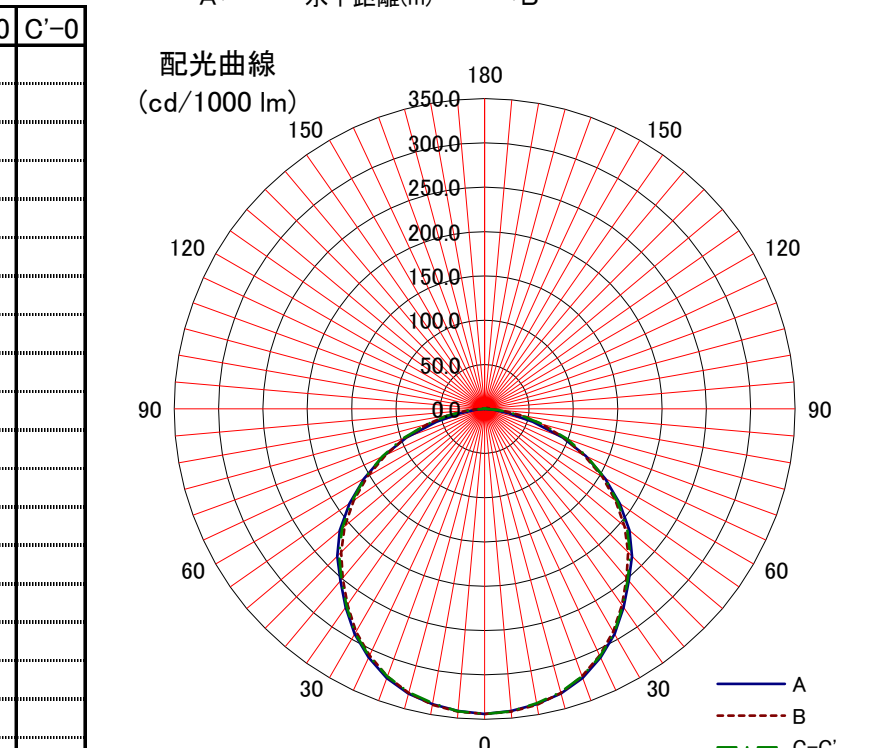
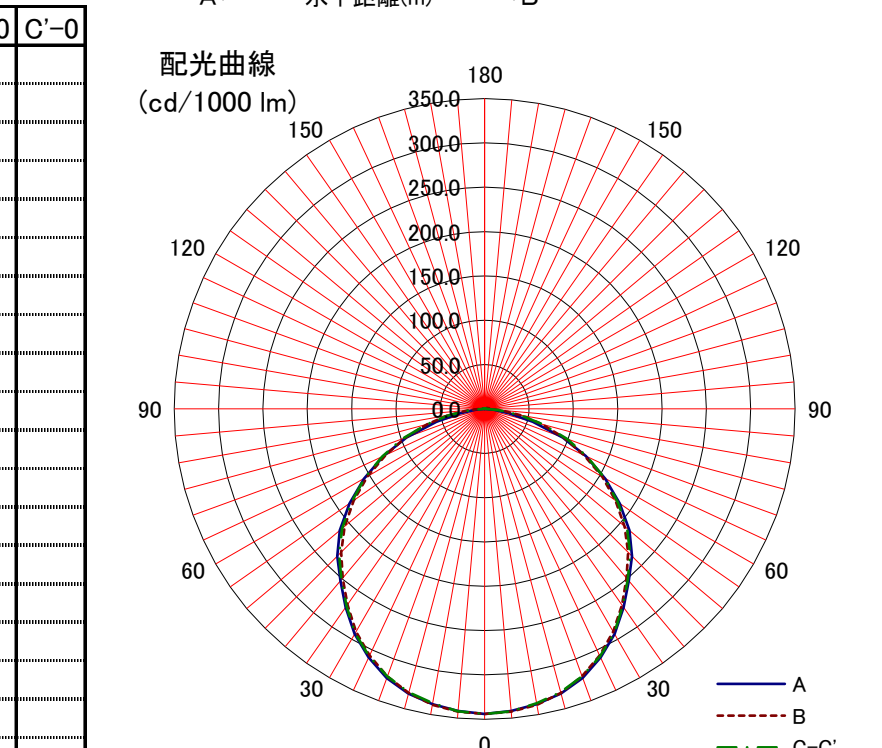


日立照明器具 照明特性

名称: 交換形LED笠付形	反射率	天井	80%				70%				50%			30%			0%			
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%				
		床	10%														0%			
形式: PC4B1	室指数	固有照明率 S/H=1.0																		
<備考>	0.6	0.58	0.46	0.38	0.57	0.46	0.38	0.33	0.44	0.38	0.33	0.43	0.37	0.33	0.31					
	0.8	0.68	0.56	0.49	0.66	0.56	0.48	0.43	0.54	0.47	0.42	0.53	0.47	0.42	0.40					
姿図 	1	0.74	0.63	0.56	0.73	0.63	0.55	0.50	0.61	0.55	0.50	0.59	0.54	0.49	0.47					
	1.25	0.80	0.70	0.63	0.78	0.69	0.63	0.57	0.68	0.62	0.57	0.66	0.61	0.56	0.54					
	1.5	0.84	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.63	0.71	0.66	0.62	0.60					
	2	0.90	0.83	0.77	0.88	0.82	0.76	0.72	0.80	0.75	0.71	0.78	0.74	0.70	0.67					
	2.5	0.93	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.80	0.76	0.82	0.78	0.75	0.72					
	3	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.81	0.79	0.76					
光源形式	4	0.99	0.94	0.90	0.97	0.93	0.90	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.81					
CE403WF-X14A	5	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.91	0.89	0.87	0.84					
器具光束	7	1.03	1.01	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.93	0.95	0.93	0.92	0.89					
2,910 lm	10	1.05	1.03	1.02	1.04	1.02	1.00	0.99	1.00	0.98	0.97	0.97	0.96	0.95	0.92					
器具効率 Ft= 100%		<div>単体照度分布(初期値)</div> 																		
上方光束 Fu= 0.5%																				
下方光束 Fd= 99.5%																				
最大取付間隔		<div>A← 水平距離(m) →B</div> 																		
A-A 1.28 H																				
B-B 1.26 H																				
保守率	良	0.86	<div>配光曲線</div> <div>(cd/1000 lm)</div> 																	
	中	0.81																		
	否	0.72																		
光度 (cd/1000 lm)		<div>A← 水平距離(m) →B</div> 																		
																A-0	B-B	C-0	A'-0	C'-0
																0	344	344	344	
																10	338	339	337	
		20	323	321	321															
		30	293	290	292															
		40	253	249	251															
		50	213	206	210															
		60	157	153	156															
		70	94	95	99															
		80	28	43	41															
		90		5	1															
		100		5	1															
		110		3	1															
		120		2	1															
		130																		
		140																		
		150																		
		160																		
		170																		
		180																		