
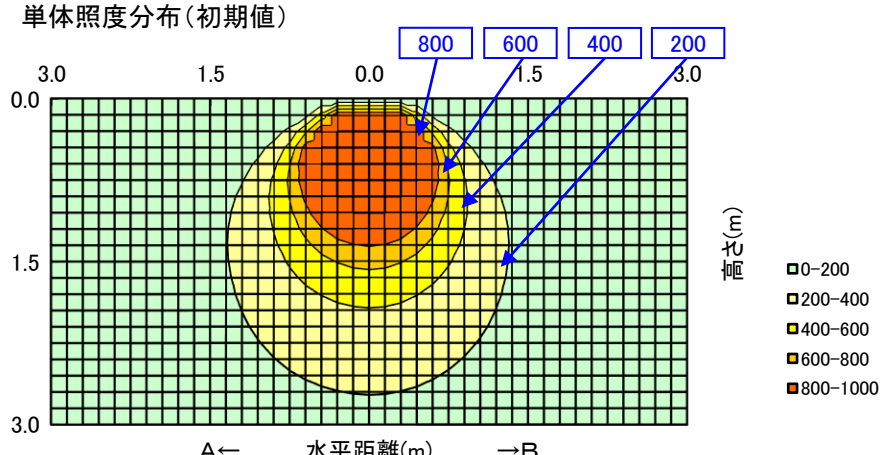
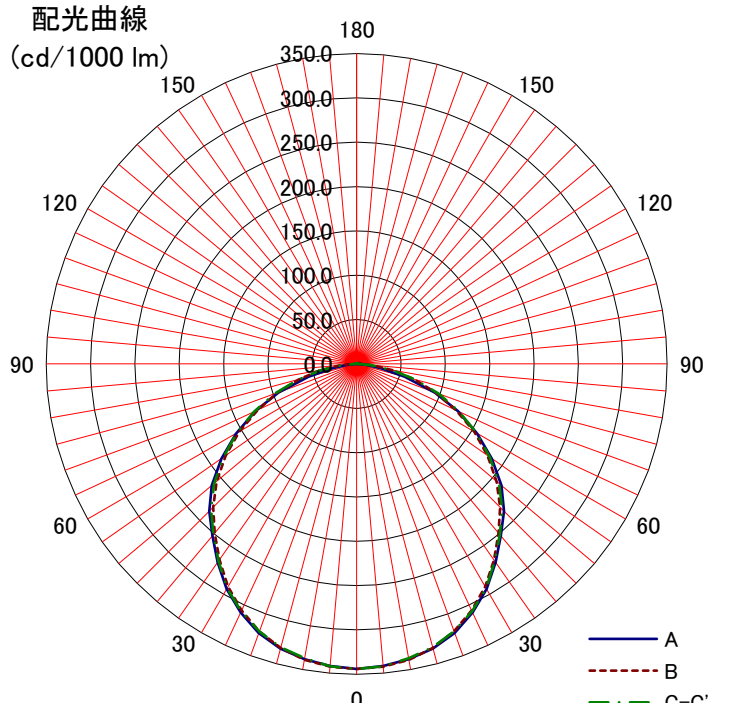


日立照明器具 照明特性

名称: 交換形LED笠付形 CP付	反射率	天井	80%			70%				50%			30%			0%			
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
		床	10%														0%		
形式: PC4B1CP	室指数	固有照明率 S/H=1.0																	
<備考>	0.6	0.58	0.46	0.38	0.57	0.46	0.38	0.33	0.44	0.38	0.33	0.43	0.37	0.33	0.31				
	0.8	0.68	0.56	0.49	0.66	0.56	0.48	0.43	0.54	0.47	0.42	0.53	0.47	0.42	0.40				
	1	0.74	0.63	0.56	0.73	0.63	0.55	0.50	0.61	0.55	0.50	0.59	0.54	0.49	0.47				
姿図 	1.25	0.80	0.70	0.63	0.78	0.69	0.63	0.57	0.68	0.62	0.57	0.66	0.61	0.56	0.54				
	1.5	0.84	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.63	0.71	0.66	0.62	0.60				
	2	0.90	0.83	0.77	0.88	0.82	0.76	0.72	0.80	0.75	0.71	0.78	0.74	0.70	0.67				
	2.5	0.93	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.80	0.76	0.82	0.78	0.75	0.72				
	3	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.81	0.79	0.76				
	4	0.99	0.94	0.90	0.97	0.93	0.90	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.81				
光源形式 CE404NE-C14A	5	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.91	0.89	0.87	0.84				
器具光束 4,320 lm	7	1.03	1.01	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.93	0.95	0.93	0.92	0.89				
	10	1.05	1.03	1.02	1.04	1.02	1.00	0.99	1.00	0.98	0.97	0.97	0.96	0.95	0.92				
器具効率 Ft= 100%		単体照度分布(初期値) 																	
上方光束 Fu= 0.5%																			
下方光束 Fd= 99.5%																			
最大取付間隔		A-A 1.28 H B-B 1.26 H																	
保守率																			
良 0.86																			
中 0.81																			
否 0.72																			
光度 (cd/1000 lm)																			
A-0	B-B																C-0	A'-0	C'-0
0	344																344	344	
10	338																339	337	
20	323																321	321	
30	293																290	292	
40	253																249	251	
50	213																206	210	
60	157																153	156	
70	94																95	99	
80	28																43	41	
90																	5	1	
100																	5	1	
110																	3	1	
120																	2	1	
130																			
140																			
150																			
160																			
170																			
180																			