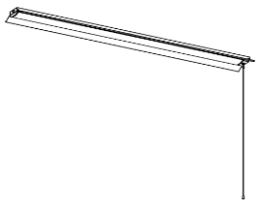
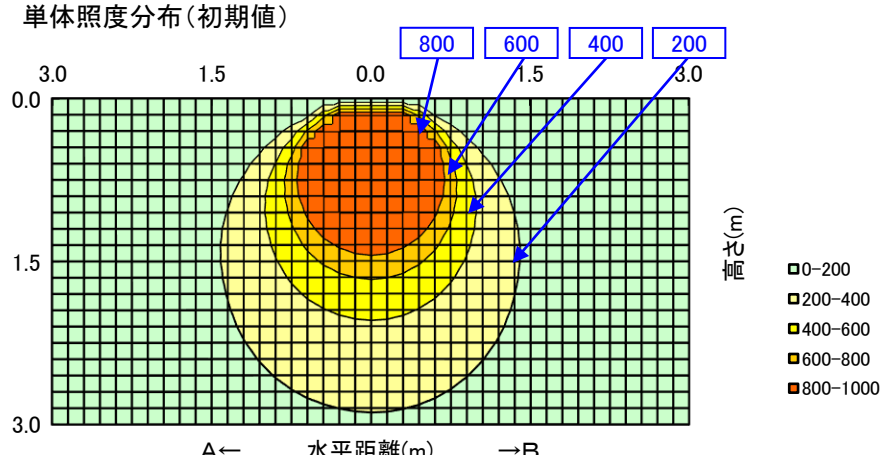
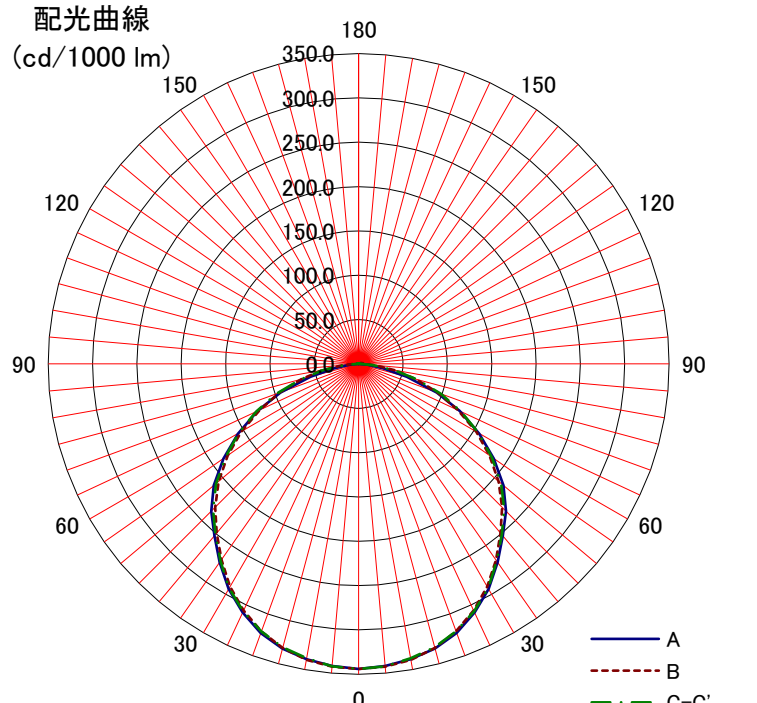


日立照明器具 照明特性

名称: 交換形LED笠付形 CP付	反射率	天井	80%			70%				50%			30%			0%													
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%													
		床	10%														0%												
形式: PC4B1CP	室指数	固有照明率 S/H=1.0																											
<備考>	0.6	0.58	0.46	0.38	0.57	0.46	0.38	0.33	0.44	0.38	0.33	0.43	0.37	0.33	0.31														
	0.8	0.68	0.56	0.49	0.66	0.56	0.48	0.43	0.54	0.47	0.42	0.53	0.47	0.42	0.40														
	1	0.74	0.63	0.56	0.73	0.63	0.55	0.50	0.61	0.55	0.50	0.59	0.54	0.49	0.47														
姿図 	1.25	0.80	0.70	0.63	0.78	0.69	0.63	0.57	0.68	0.62	0.57	0.66	0.61	0.56	0.54														
	1.5	0.84	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.63	0.71	0.66	0.62	0.60														
	2	0.90	0.83	0.77	0.88	0.82	0.76	0.72	0.80	0.75	0.71	0.78	0.74	0.70	0.67														
	2.5	0.93	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.80	0.76	0.82	0.78	0.75	0.72														
	3	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.81	0.79	0.76														
光源形式 CE405DE-X14A	4	0.99	0.94	0.90	0.97	0.93	0.90	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.81														
器具光束 4,850 lm	5	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.91	0.89	0.87	0.84														
	7	1.03	1.01	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.93	0.95	0.93	0.92	0.89														
	10	1.05	1.03	1.02	1.04	1.02	1.00	0.99	1.00	0.98	0.97	0.97	0.96	0.95	0.92														
器具効率 Ft= 100%		単体照度分布(初期値) 																											
上方光束 Fu= 0.5%																													
下方光束 Fd= 99.5%																													
最大取付間隔		A← 水平距離(m) →B 																											
A-A	1.28															H													
B-B	1.26															H													
保守率	良	0.86																											
	中	0.81																											
	否	0.72																											
光度 (cd/1000 lm)																													
	A-0	B-B															C-0	A'-0	C'-0										
0	344	344															344												
10	338	339															337												
20	323	321															321												
30	293	290															292												
40	253	249															251												
50	213	206															210												
60	157	153															156												
70	94	95															99												
80	28	43															41												
90		5															1												
100		5															1												
110		3															1												
120		2															1												
130																													
140																													
150																													
160																													
170																													
180																													