
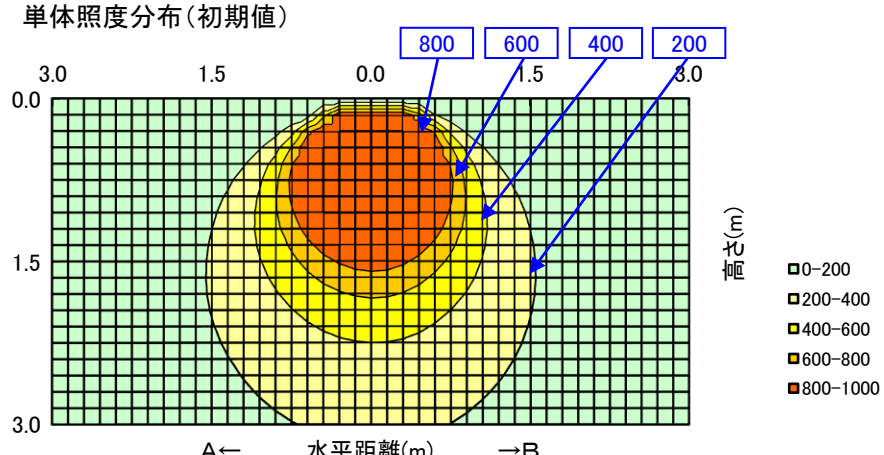
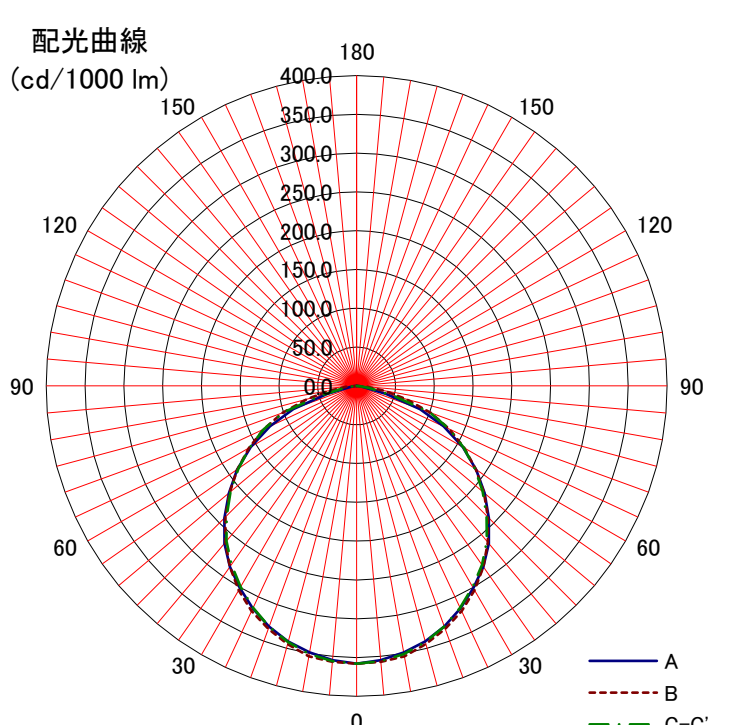


日立照明器具 照明特性

名称: 交換形LED埋込形		天井	80%			70%				50%			30%			0%			
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
形式: TC4A		床	10%														0%		
			固有照明率 S/H=1.0																
〈備考〉		室指数	0.6	0.59	0.47	0.39	0.57	0.46	0.39	0.34	0.45	0.39	0.34	0.44	0.38	0.34	0.32		
			0.8	0.68	0.57	0.50	0.67	0.57	0.49	0.44	0.55	0.49	0.44	0.54	0.48	0.43	0.41		
姿図 		1	0.75	0.64	0.57	0.73	0.64	0.57	0.51	0.62	0.56	0.51	0.61	0.55	0.51	0.48			
		1.25	0.81	0.71	0.64	0.79	0.71	0.64	0.59	0.69	0.63	0.58	0.67	0.62	0.58	0.56			
		1.5	0.85	0.77	0.70	0.84	0.76	0.70	0.65	0.74	0.69	0.64	0.72	0.68	0.64	0.61			
		2	0.91	0.84	0.78	0.89	0.83	0.78	0.73	0.81	0.76	0.73	0.79	0.75	0.72	0.69			
		2.5	0.94	0.88	0.83	0.93	0.87	0.83	0.79	0.85	0.81	0.78	0.83	0.80	0.77	0.74			
		3	0.96	0.91	0.87	0.95	0.90	0.86	0.82	0.88	0.84	0.81	0.86	0.83	0.80	0.78			
光源形式 CET406NE-N14A		4	0.99	0.95	0.92	0.98	0.94	0.91	0.88	0.92	0.89	0.86	0.90	0.87	0.85	0.83			
		5	1.01	0.98	0.95	1.00	0.97	0.94	0.91	0.95	0.92	0.90	0.92	0.90	0.89	0.86			
器具光束 5,660 lm		7	1.04	1.01	0.99	1.02	1.00	0.98	0.96	0.98	0.96	0.95	0.96	0.94	0.93	0.90			
		10	1.05	1.04	1.02	1.04	1.03	1.01	1.00	1.00	0.99	0.98	0.98	0.97	0.96	0.94			
器具効率 Ft= 100%			単体照度分布(初期値) 																
上方光束 Fu= 0%																			
下方光束 Fd= 100%																			
最大取付間隔			A-A 1.26 H B-B 1.28 H																
保守率	良	0.86																	
	中	0.81																	
	否	0.72																	
光度 (cd/1000 lm)			配光曲線 (cd/1000 lm) 																
	A-0	B-B															C-0	A'-0	C'-0
0	358	358															358		
10	349	354															351		
20	330	333															330		
30	301	304															299		
40	265	263															261		
50	215	214															212		
60	158	160															159		
70	87	102															100		
80	9	37															17		
90																			
100																			
110																			
120																			
130																			
140																			
150																			
160																			
170																			
180																			