
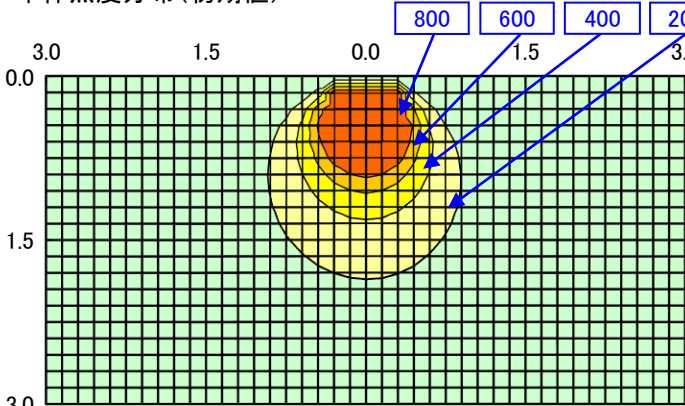
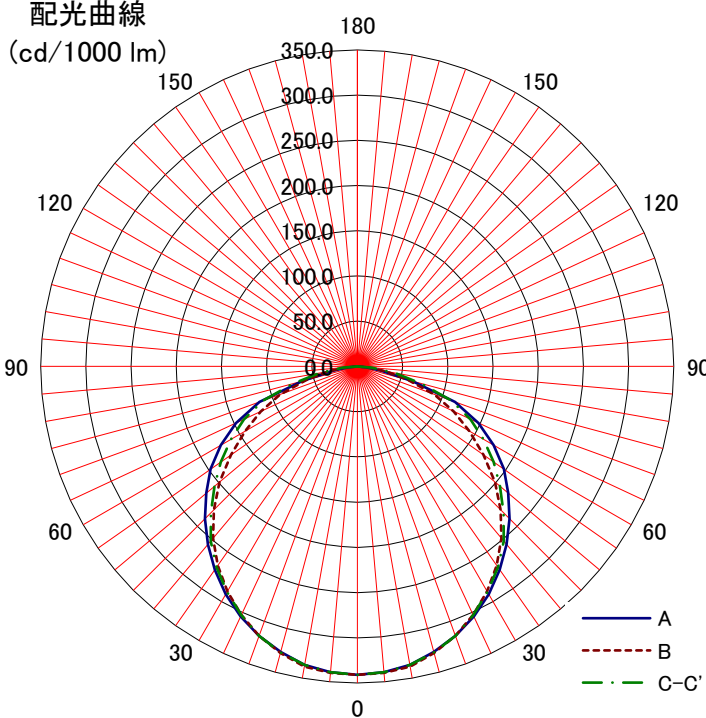


日立照明器具 照明特性																														
名称: 交換形LED埋込形	反射率	天井	80%			70%				50%			30%			0%														
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%														
		床	10%													0%														
形式: TC4C1	室指数	固有照明率 S/H=1.0																												
<備考>	0.6	0.58	0.46	0.38	0.57	0.45	0.38	0.33	0.44	0.37	0.32	0.43	0.37	0.32	0.30															
	0.8	0.67	0.56	0.48	0.66	0.55	0.48	0.42	0.54	0.47	0.42	0.53	0.47	0.42	0.40															
姿図 	1	0.74	0.63	0.55	0.72	0.62	0.55	0.49	0.61	0.54	0.49	0.59	0.53	0.49	0.47															
	1.25	0.80	0.70	0.63	0.78	0.69	0.62	0.57	0.67	0.61	0.56	0.66	0.60	0.56	0.54															
	1.5	0.84	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.62	0.71	0.66	0.62	0.59															
	2	0.90	0.83	0.77	0.88	0.82	0.76	0.71	0.80	0.75	0.71	0.78	0.74	0.70	0.67															
	2.5	0.93	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.80	0.76	0.82	0.78	0.75	0.73															
	3	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.76															
	4	0.99	0.94	0.91	0.97	0.93	0.90	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.81															
光源形式 CET402WWE-X14A	5	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.89	0.87	0.85															
器具光束	7	1.03	1.01	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.94	0.95	0.93	0.92	0.89															
2,020 lm	10	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.97	0.98	0.97	0.96	0.93															
器具効率 Ft= 100%		<div>単体照度分布(初期値)</div>  <div>0-200 200-400 400-600 600-800 800-1000</div>																												
上方光束 Fu= 0.0%																														
下方光束 Fd= 100.0%																														
最大取付間隔																														
A-A 1.28 H																														
B-B 1.26 H																														
保守率	良	0.86	<div>配光曲線</div> <div>(cd/1000 lm)</div>  <div>A B C-C'</div>																											
	中	0.81																												
	否	0.72																												
光度 (cd/1000 lm)																														
	A-0	B-B																C-0	A'-0	C'-0										
0	341	341																341												
10	335	337	335																											
20	317	317	317																											
30	291	287	288																											
40	257	248	252																											
50	218	199	206																											
60	174	143	161																											
70	115	91	111																											
80	27	33	43																											
90																														
100																														
110																														
120																														
130																														
140																														
150																														
160																														
170																														
180																														