
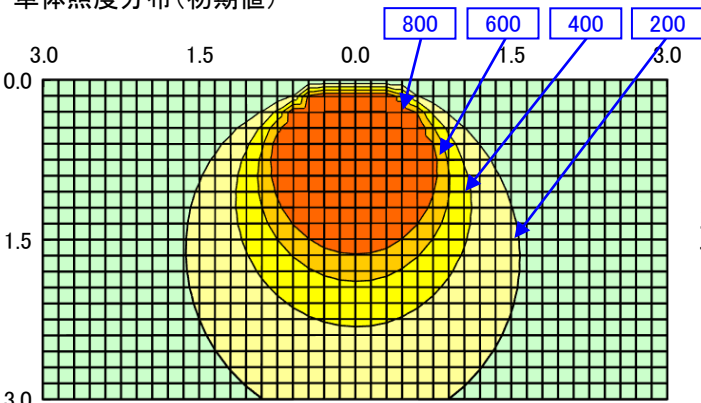
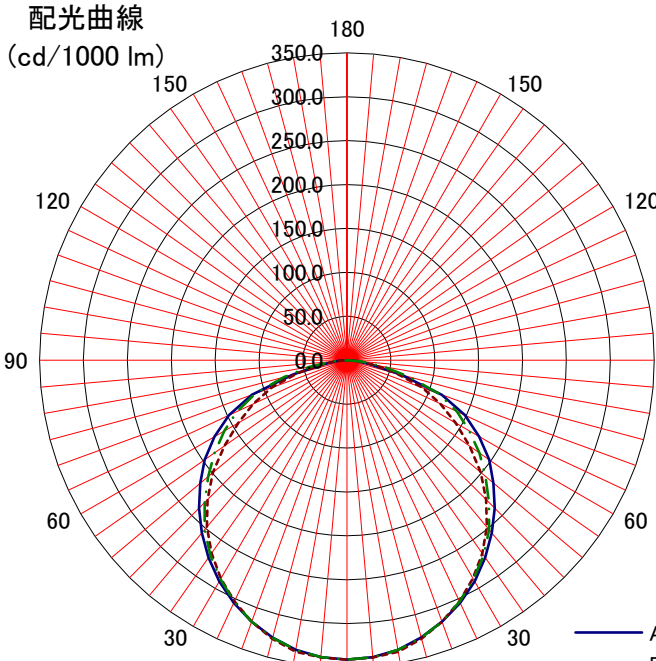


日立照明器具 照明特性

名称：交換形LED埋込形			天井	80%			70%				50%			30%			0%		
形式：TC4C1			反射率	壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
			床	10%															
			室指数	固有照明率 S/H=1.0															
<div>＜備考＞</div> <div>姿図</div> <div></div>			0.6	0.58	0.46	0.38	0.57	0.45	0.38	0.33	0.44	0.37	0.32	0.43	0.37	0.32	0.30		
			0.8	0.67	0.56	0.48	0.66	0.55	0.48	0.42	0.54	0.47	0.42	0.53	0.47	0.42	0.40		
			1	0.74	0.63	0.55	0.72	0.62	0.55	0.49	0.61	0.54	0.49	0.59	0.53	0.49	0.47		
			1.25	0.80	0.70	0.63	0.78	0.69	0.62	0.57	0.67	0.61	0.56	0.66	0.60	0.56	0.54		
			1.5	0.84	0.76	0.69	0.83	0.75	0.68	0.63	0.73	0.67	0.62	0.71	0.66	0.62	0.59		
			2	0.90	0.83	0.77	0.88	0.82	0.76	0.71	0.80	0.75	0.71	0.78	0.74	0.70	0.67		
			2.5	0.93	0.87	0.82	0.92	0.86	0.81	0.77	0.84	0.80	0.76	0.82	0.78	0.75	0.73		
光源形式			3	0.96	0.90	0.86	0.94	0.89	0.85	0.81	0.87	0.83	0.80	0.85	0.82	0.79	0.76		
CET407DG-C14A			4	0.99	0.94	0.91	0.97	0.93	0.90	0.86	0.91	0.88	0.85	0.89	0.86	0.84	0.81		
器具光束			5	1.01	0.97	0.94	0.99	0.96	0.93	0.90	0.94	0.91	0.89	0.92	0.89	0.87	0.85		
6,300 lm			7	1.03	1.01	0.98	1.02	0.99	0.97	0.95	0.97	0.95	0.94	0.95	0.93	0.92	0.89		
			10	1.05	1.03	1.02	1.04	1.02	1.01	0.99	1.00	0.99	0.97	0.98	0.97	0.96	0.93		
器具効率 Ft= 100%			<div>単体照度分布(初期値)</div> <div></div> <div>(m) 縦</div> <div>0-200 200-400 400-600 600-800 800-1000</div>																
上方光束 Fu= 0.0%																			
下方光束 Fd= 100.0%																			
最大取付間隔																			
A-A 1.28 H B-B 1.26 H																			
保守率	良	0.86	<div>配光曲線</div> <div>(cd/1000 lm)</div> <div></div> <div>A B C-C'</div>																
	中	0.81																	
	否	0.72																	
光度 (cd/1000 lm)																			
	A-0	B-B	C-0	A'-0	C'-0														
0	341	341	341																
10	335	337	335																
20	317	317	317																
30	291	287	288																
40	257	248	252																
50	218	199	206																
60	174	143	161																
70	115	91	111																
80	27	33	43																
90																			
100																			
110																			
120																			
130																			
140																			
150																			
160																			
170																			
180																			