
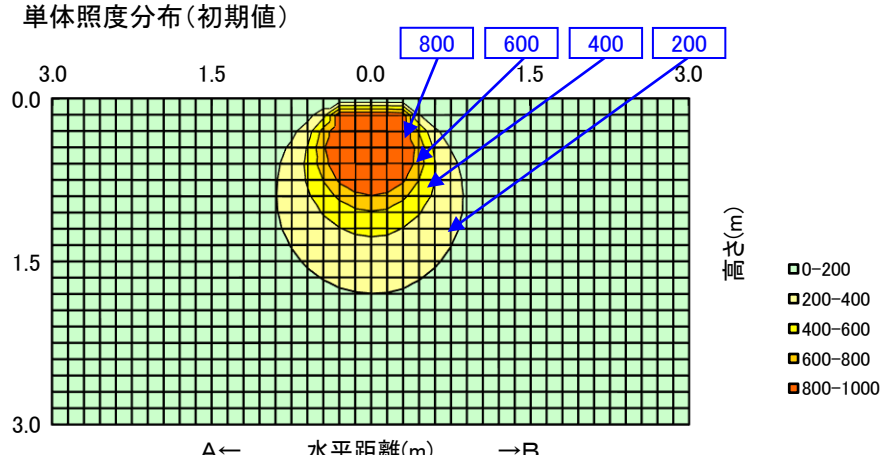
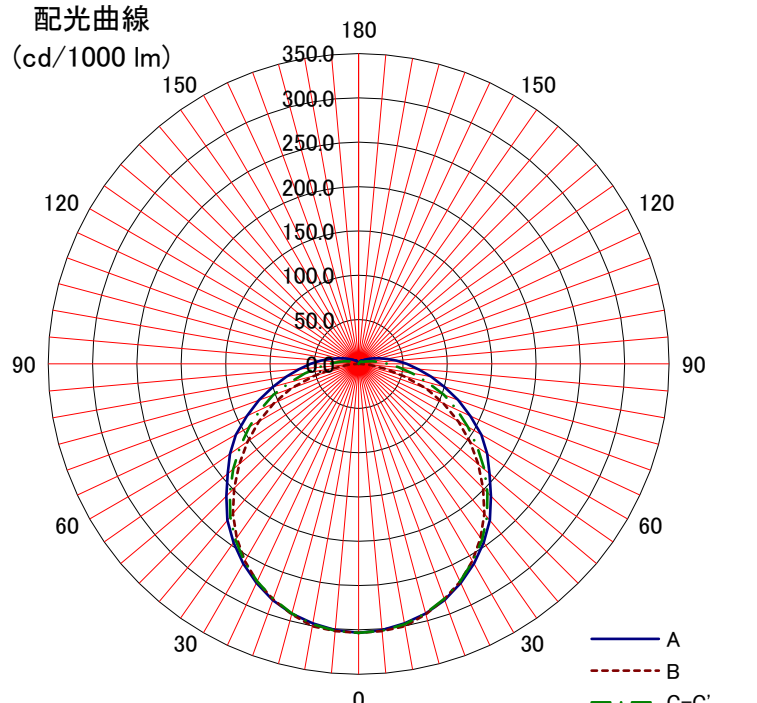


日立照明器具 照明特性

名称: 交換形LED逆富士形	天井 反射率	80%			70%				50%			30%			0%				
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
		床	10%														0%		
形式: WGN4B1	室指数	固有照明率 S/H=1.0																	
<備考>	0.6	0.56	0.44	0.36	0.54	0.43	0.35	0.30	0.41	0.35	0.30	0.40	0.34	0.29	0.27				
	0.8	0.65	0.53	0.45	0.63	0.52	0.45	0.39	0.51	0.44	0.39	0.49	0.43	0.38	0.35				
姿図 	1	0.71	0.60	0.52	0.69	0.59	0.52	0.46	0.57	0.50	0.45	0.55	0.49	0.44	0.42				
	1.25	0.77	0.67	0.59	0.75	0.66	0.59	0.53	0.63	0.57	0.52	0.61	0.55	0.51	0.48				
	1.5	0.81	0.72	0.65	0.79	0.71	0.64	0.59	0.68	0.62	0.57	0.66	0.61	0.56	0.53				
	2	0.87	0.79	0.73	0.85	0.78	0.72	0.67	0.75	0.70	0.65	0.72	0.68	0.64	0.60				
	2.5	0.91	0.84	0.78	0.88	0.82	0.77	0.72	0.79	0.74	0.70	0.76	0.72	0.69	0.65				
	3	0.93	0.87	0.82	0.91	0.85	0.80	0.76	0.82	0.78	0.74	0.79	0.75	0.72	0.69				
光源形式	4	0.96	0.91	0.87	0.94	0.89	0.85	0.82	0.86	0.83	0.80	0.83	0.80	0.77	0.74				
WGE402WWE-N14A1	5	0.98	0.94	0.90	0.96	0.92	0.89	0.86	0.89	0.86	0.83	0.86	0.83	0.81	0.77				
器具光束	7	1.01	0.98	0.95	0.99	0.96	0.93	0.91	0.93	0.90	0.88	0.89	0.88	0.86	0.82				
2,130 lm	10	1.03	1.01	0.99	1.01	0.99	0.97	0.95	0.96	0.94	0.92	0.92	0.91	0.90	0.86				
器具効率 Ft= 100%		単体照度分布(初期値) 																	
上方光束 Fu= 5.2%																			
下方光束 Fd= 94.8%																			
最大取付間隔		(E)lx ■0-200 ■200-400 ■400-600 ■600-800 ■800-1000																	
A-A 1.28 H																			
B-B 1.26 H																			
保守率	良	0.88																	
	中	0.86																	
	否	0.81																	
光度 (cd/1000 lm)		配光曲線 (cd/1000 lm) 																	
	A-0															B-B	C-0	A'-0	C'-0
0	303															303	303		
10	297															300	298		
20	283															282	282		
30	260															257	257		
40	230															221	225		
50	193															176	185		
60	160															130	142		
70	119															81	102		
80	83															30	62		
90	54															1	33		
100	33																17		
110	18																7		
120	11																5		
130	6																4		
140	4																3		
150	4																2		
160																			
170																			
180																			