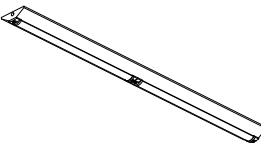
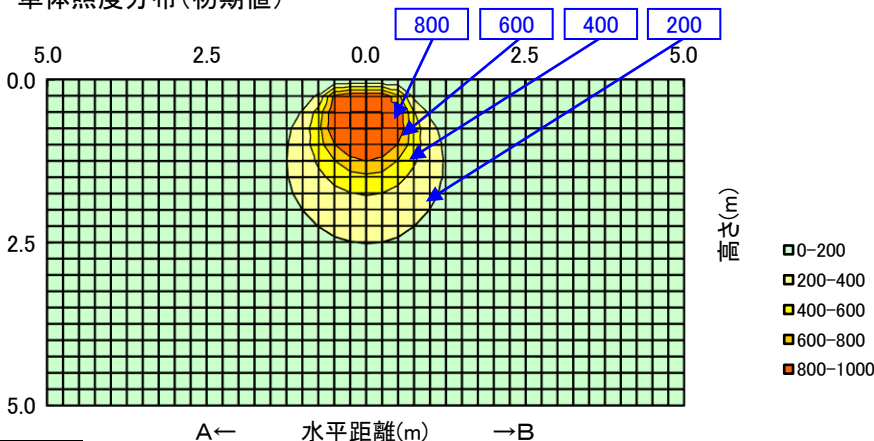
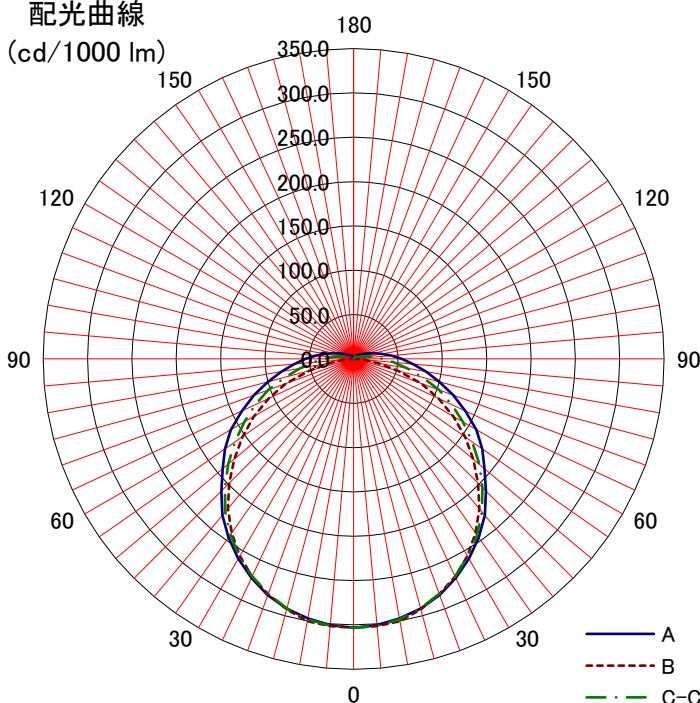


日立照明器具 照明特性

名称: 交換形LED逆富士形	天井 反射率	80%			70%				50%			30%			0%							
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%						
		床	10%														0%					
形式: WGN8B1	室指数	固有照明率 S/H=1.0																				
＜備考＞ 防湿・防雨形 (オイルミスト対応)	0.6	0.56	0.44	0.36	0.54	0.43	0.35	0.30	0.41	0.35	0.30	0.40	0.34	0.29	0.27							
	0.8	0.65	0.53	0.45	0.63	0.52	0.45	0.39	0.51	0.44	0.39	0.49	0.43	0.38	0.35							
姿図 	1	0.71	0.60	0.52	0.69	0.59	0.52	0.46	0.57	0.50	0.45	0.55	0.49	0.44	0.42							
	1.25	0.77	0.67	0.59	0.75	0.66	0.59	0.53	0.63	0.57	0.52	0.61	0.55	0.51	0.48							
	1.5	0.81	0.72	0.65	0.79	0.71	0.64	0.59	0.68	0.62	0.57	0.66	0.61	0.56	0.53							
	2	0.87	0.79	0.73	0.85	0.78	0.72	0.67	0.75	0.70	0.65	0.72	0.68	0.64	0.60							
	2.5	0.91	0.84	0.78	0.88	0.82	0.77	0.72	0.79	0.74	0.70	0.76	0.72	0.69	0.65							
	3	0.93	0.87	0.82	0.91	0.85	0.80	0.76	0.82	0.78	0.74	0.79	0.75	0.72	0.69							
光源形式 WGE402DE-N14A1	4	0.96	0.91	0.87	0.94	0.89	0.85	0.82	0.86	0.83	0.80	0.83	0.80	0.77	0.74							
	5	0.98	0.94	0.90	0.96	0.92	0.89	0.86	0.89	0.86	0.83	0.86	0.83	0.81	0.77							
器具光束 4,180 lm	7	1.01	0.98	0.95	0.99	0.96	0.93	0.91	0.93	0.90	0.88	0.89	0.88	0.86	0.82							
	10	1.03	1.01	0.99	1.01	0.99	0.97	0.95	0.96	0.94	0.92	0.92	0.91	0.90	0.86							
器具効率 Ft= 100%		単体照度分布(初期値) 																				
上方光束 Fu= 5.2%																						
下方光束 Fd= 94.8%																						
最大取付間隔		A← 水平距離(m) →B 																				
A-A 1.28 H																						
B-B 1.26 H																						
保守率	良	0.88	光度 (cd/1000 lm)																			
	中	0.86																				
	否	0.81																				
																		A-0	B-B	C-0	A'-0	C'-0
0	303	303																303				
10	297	300	298																			
20	283	282	282																			
30	260	257	257																			
40	230	221	225																			
50	193	176	185																			
60	160	130	142																			
70	119	81	102																			
80	83	30	62																			
90	54	1	33																			
100	33		17																			
110	18		7																			
120	11		5																			
130	6		4																			
140	4		3																			
150	4		2																			
160																						
170																						
180																						