
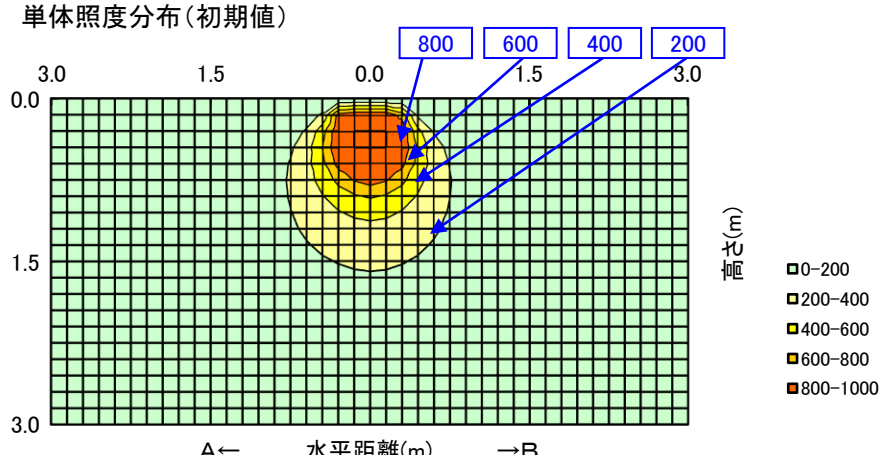
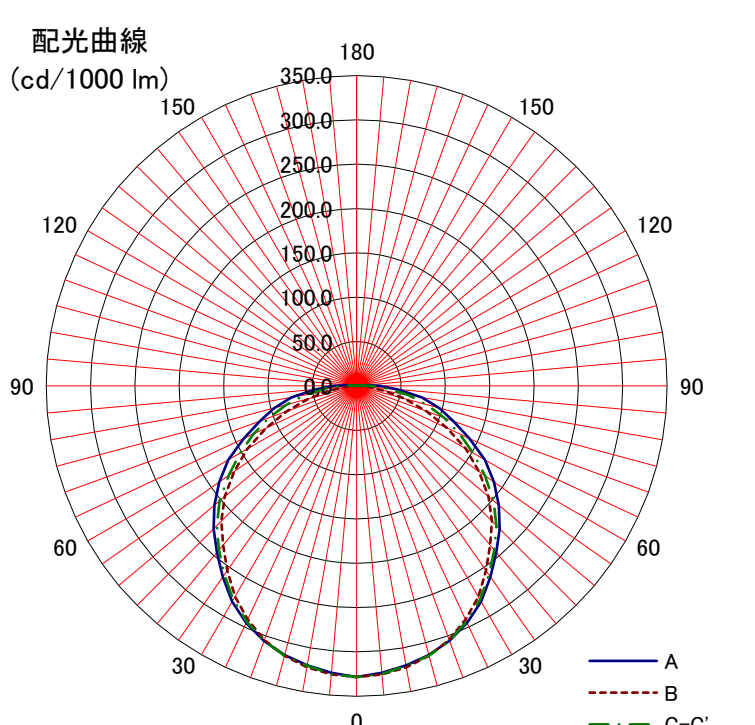


日立照明器具 照明特性

名称: 交換形LED笠付形	反射率	天井	80%			70%				50%			30%			0%		
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
		床	10%														0%	
形式: WGP2B	室指数		固有照明率 S/H=1.0															
<備考> 防湿・防雨形 (オイルミスト対応)		0.6	0.57	0.45	0.37	0.56	0.44	0.37	0.32	0.43	0.36	0.31	0.42	0.36	0.31	0.29		
姿図 	0.8	0.67	0.55	0.47	0.65	0.54	0.47	0.41	0.53	0.46	0.41	0.51	0.45	0.40	0.38			
	1	0.73	0.62	0.54	0.71	0.61	0.54	0.48	0.59	0.53	0.48	0.58	0.52	0.47	0.45			
	1.25	0.79	0.69	0.61	0.77	0.68	0.61	0.55	0.66	0.60	0.55	0.64	0.59	0.54	0.52			
	1.5	0.83	0.74	0.67	0.81	0.73	0.66	0.61	0.71	0.65	0.60	0.69	0.64	0.60	0.57			
	2	0.89	0.81	0.75	0.87	0.80	0.74	0.69	0.78	0.73	0.68	0.76	0.71	0.68	0.65			
	2.5	0.92	0.86	0.80	0.91	0.84	0.79	0.75	0.82	0.78	0.74	0.80	0.76	0.73	0.70			
	3	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.85	0.81	0.77	0.83	0.79	0.76	0.74			
光源形式	4	0.98	0.93	0.89	0.96	0.92	0.88	0.84	0.89	0.86	0.83	0.87	0.84	0.82	0.79			
WGE201WWE-N14A	5	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.89	0.87	0.90	0.88	0.85	0.82			
器具光束	7	1.02	1.00	0.97	1.01	0.98	0.96	0.93	0.96	0.94	0.92	0.94	0.92	0.90	0.87			
1,540 lm	10	1.04	1.02	1.01	1.03	1.01	0.99	0.98	0.99	0.97	0.96	0.96	0.95	0.94	0.91			
器具効率 Ft= 100%		<div>単体照度分布 (初期値)</div> 																
上方光束 Fu= 0.6%																		
下方光束 Fd= 99.4%																		
最大取付間隔		<div>配光曲線</div> 																
A-A 1.28 H																		
B-B 1.24 H																		
保守率	良	0.86	A ← 水平距離(m) → B															
	中	0.81																
	否	0.72																
光度 (cd/1000 lm)																		
	A-0	B-B	C-0	A'-0	C'-0													
0	328	328	328															
10	320	322	320															
20	306	305	306															
30	281	274	278															
40	245	234	241															
50	209	194	202															
60	167	142	152															
70	116	85	105															
80	75	33	60															
90	26		16															
100																		
110																		
120																		
130																		
140																		
150																		
160																		
170																		
180																		