
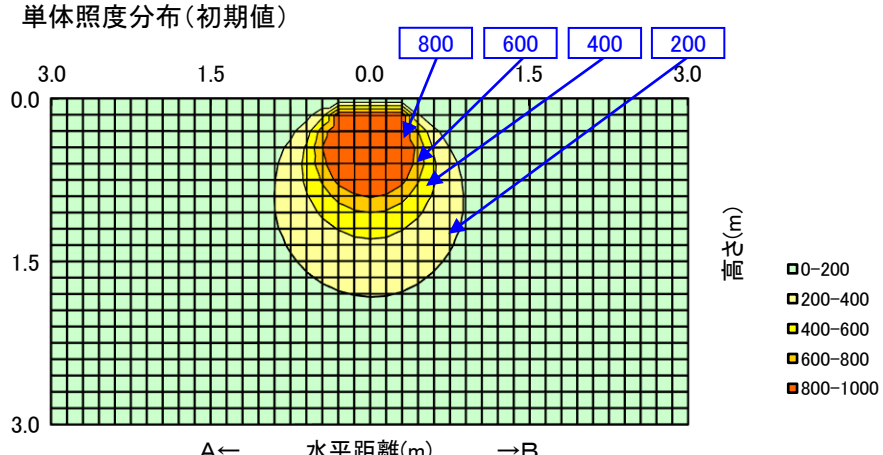


# 日立照明器具 照明特性

名称: 交換形LEDトラフ形		天井	80%			70%				50%			30%			0%				
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%			
形式: WGP4A1		反射率	床	10%												0%				
				固有照明率 S/H=1.0																
<備考> 防湿・防雨形 (オイルミスト対応)		室指数	0.6	0.56	0.44	0.36	0.54	0.43	0.35	0.30	0.41	0.35	0.30	0.40	0.34	0.29	0.27			
		0.8	0.65	0.53	0.45	0.63	0.52	0.45	0.39	0.51	0.44	0.39	0.49	0.43	0.38	0.35				
姿図		1	0.71	0.60	0.52	0.69	0.59	0.52	0.46	0.57	0.50	0.45	0.55	0.49	0.44	0.42				
		1.25	0.77	0.67	0.59	0.75	0.66	0.59	0.53	0.63	0.57	0.52	0.61	0.55	0.51	0.48				
		1.5	0.81	0.72	0.65	0.79	0.71	0.64	0.59	0.68	0.62	0.57	0.66	0.61	0.56	0.53				
		2	0.87	0.79	0.73	0.85	0.78	0.72	0.67	0.75	0.70	0.65	0.72	0.68	0.64	0.60				
		2.5	0.91	0.84	0.78	0.88	0.82	0.77	0.72	0.79	0.74	0.70	0.76	0.72	0.69	0.65				
		3	0.93	0.87	0.82	0.91	0.85	0.80	0.76	0.82	0.78	0.74	0.79	0.75	0.72	0.69				
光源形式 WGE402NE-N14A1		4	0.96	0.91	0.87	0.94	0.89	0.85	0.82	0.86	0.83	0.80	0.83	0.80	0.77	0.74				
		5	0.98	0.94	0.90	0.96	0.92	0.89	0.86	0.89	0.86	0.83	0.86	0.83	0.81	0.77				
器具光束 2,200 lm		7	1.01	0.98	0.95	0.99	0.96	0.93	0.91	0.93	0.90	0.88	0.89	0.88	0.86	0.82				
		10	1.03	1.01	0.99	1.01	0.99	0.97	0.95	0.96	0.94	0.92	0.92	0.91	0.90	0.86				
器具効率 Ft= 100%			<div>単体照度分布(初期値)</div> 																	
上方光束 Fu= 5.2%																				
下方光束 Fd= 94.8%																				
最大取付間隔																				
A-A		1.28																H		
B-B		1.26																H		
保守率	良	0.88																		
	中	0.86																		
	否	0.81																		
光度 (cd/1000 lm)			<div>配光曲線 (cd/1000 lm)</div> 																	
	A-0	B-B																C-0	A'-0	C'-0
0	303	303																303		
10	297	300																298		
20	283	282																282		
30	260	257																257		
40	230	221																225		
50	193	176																185		
60	160	130																142		
70	119	81																102		
80	83	30																62		
90	54	1																33		
100	33																	17		
110	18																	7		
120	11																	5		
130	6																	4		
140	4																	3		
150	4																	2		
160																				
170																				
180																				

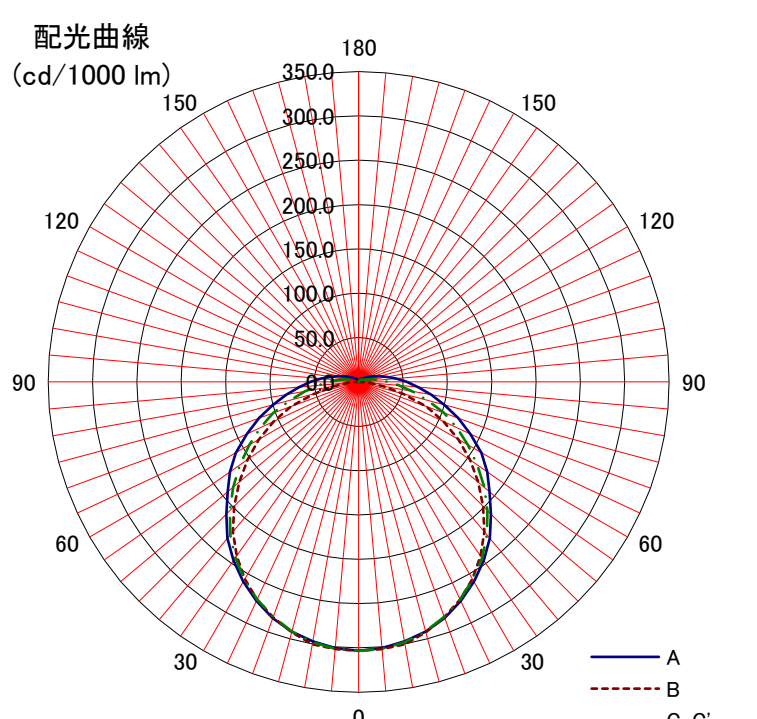