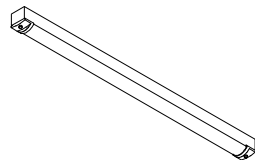
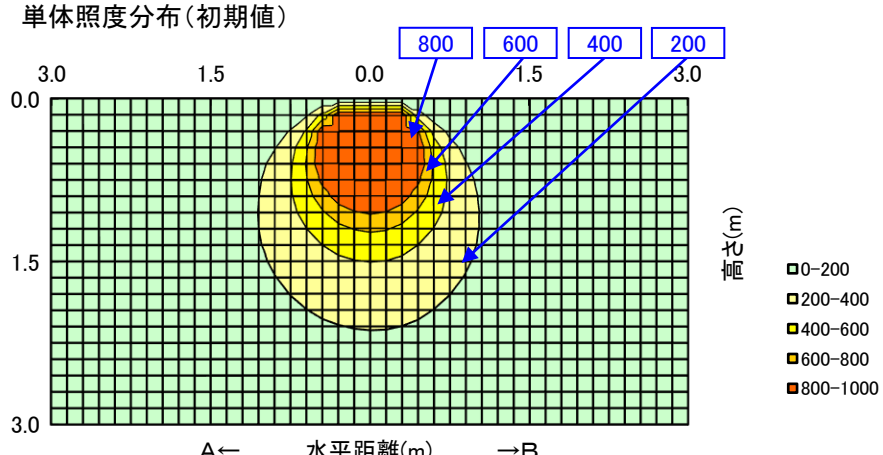
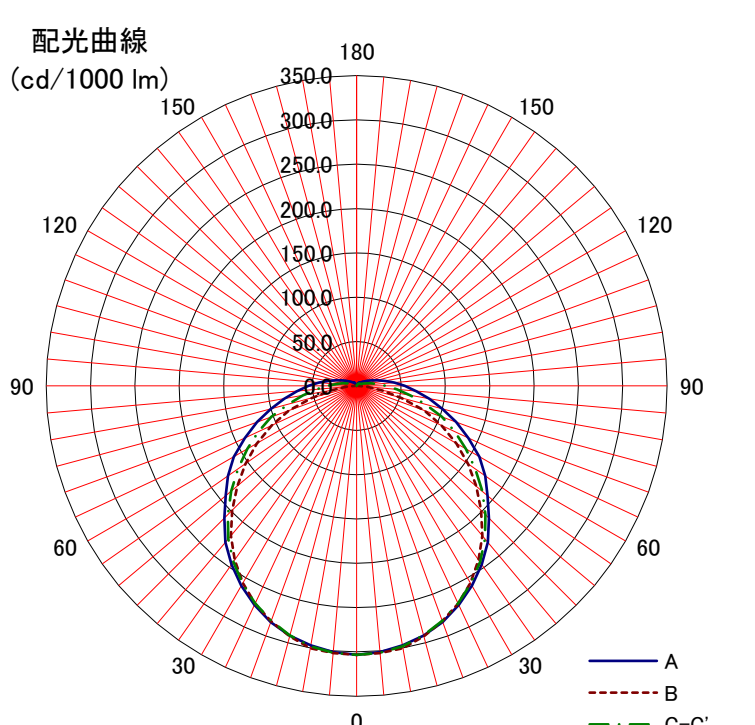
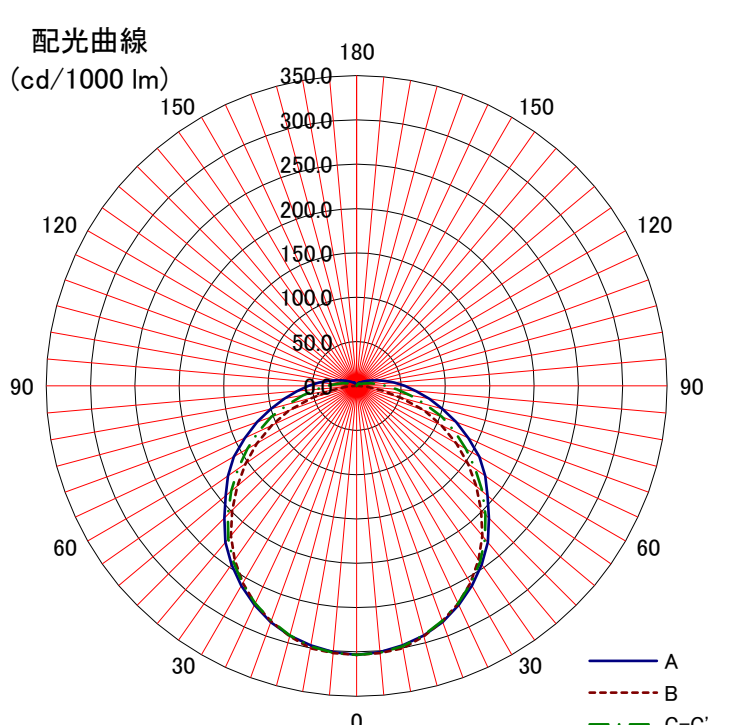


# 日立照明器具 照明特性

名称: 交換形LEDトラフ形		天井 反射率	80%			70%				50%			30%			0%		
			壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%	
形式: WGP4A1		床 室指数	固有照明率 S/H=1.0															0%
																		0%
<備考> 防湿・防雨形 (オイルミスト対応)		0.6	0.56	0.44	0.36	0.54	0.43	0.35	0.30	0.41	0.35	0.30	0.40	0.34	0.29	0.27		
		0.8	0.65	0.53	0.45	0.63	0.52	0.45	0.39	0.51	0.44	0.39	0.49	0.43	0.38	0.35		
姿図 		1	0.71	0.60	0.52	0.69	0.59	0.52	0.46	0.57	0.50	0.45	0.55	0.49	0.44	0.42		
		1.25	0.77	0.67	0.59	0.75	0.66	0.59	0.53	0.63	0.57	0.52	0.61	0.55	0.51	0.48		
		1.5	0.81	0.72	0.65	0.79	0.71	0.64	0.59	0.68	0.62	0.57	0.66	0.61	0.56	0.53		
		2	0.87	0.79	0.73	0.85	0.78	0.72	0.67	0.75	0.70	0.65	0.72	0.68	0.64	0.60		
		2.5	0.91	0.84	0.78	0.88	0.82	0.77	0.72	0.79	0.74	0.70	0.76	0.72	0.69	0.65		
		3	0.93	0.87	0.82	0.91	0.85	0.80	0.76	0.82	0.78	0.74	0.79	0.75	0.72	0.69		
光源形式		4	0.96	0.91	0.87	0.94	0.89	0.85	0.82	0.86	0.83	0.80	0.83	0.80	0.77	0.74		
WGE403NF-N14A1		5	0.98	0.94	0.90	0.96	0.92	0.89	0.86	0.89	0.86	0.83	0.86	0.83	0.81	0.77		
器具光束		7	1.01	0.98	0.95	0.99	0.96	0.93	0.91	0.93	0.90	0.88	0.89	0.88	0.86	0.82		
3,000 lm		10	1.03	1.01	0.99	1.01	0.99	0.97	0.95	0.96	0.94	0.92	0.92	0.91	0.90	0.86		
器具効率 Ft= 100%			<div>単体照度分布(初期値)</div> 															
上方光束 Fu= 5.2%																		
下方光束 Fd= 94.8%																		
最大取付間隔			<div>配光曲線 (cd/1000 lm)</div> 															
A-A 1.28 H																		
B-B 1.26 H																		
保守率	良	0.88																
	中	0.86																
	否	0.81																
光度 (cd/1000 lm)																		
	A-0	B-B																C-0
	0	303	303	303			<div>配光曲線 (cd/1000 lm)</div> 											
	10	297	300	298														
	20	283	282	282														
	30	260	257	257														
	40	230	221	225														
	50	193	176	185														
	60	160	130	142														
	70	119	81	102														
	80	83	30	62														
	90	54	1	33														
	100	33		17														
	110	18		7														
	120	11		5														
	130	6		4														
	140	4		3														
	150	4		2														
	160																	
	170																	
	180																	