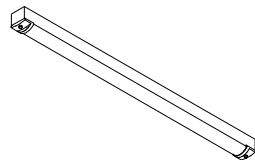
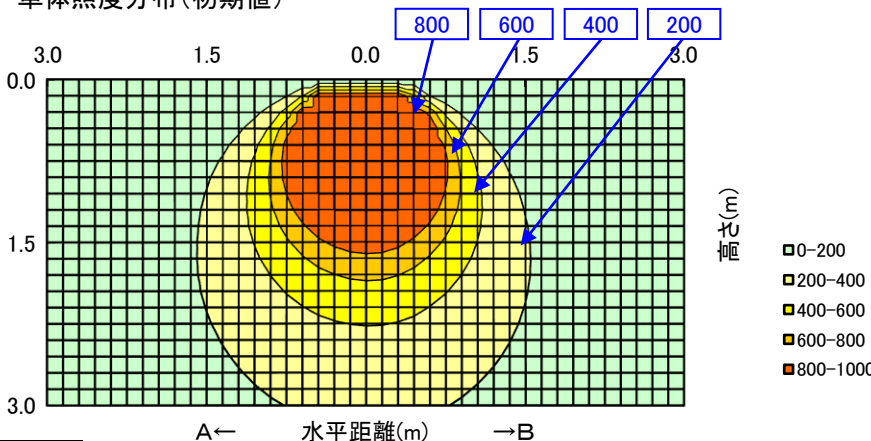
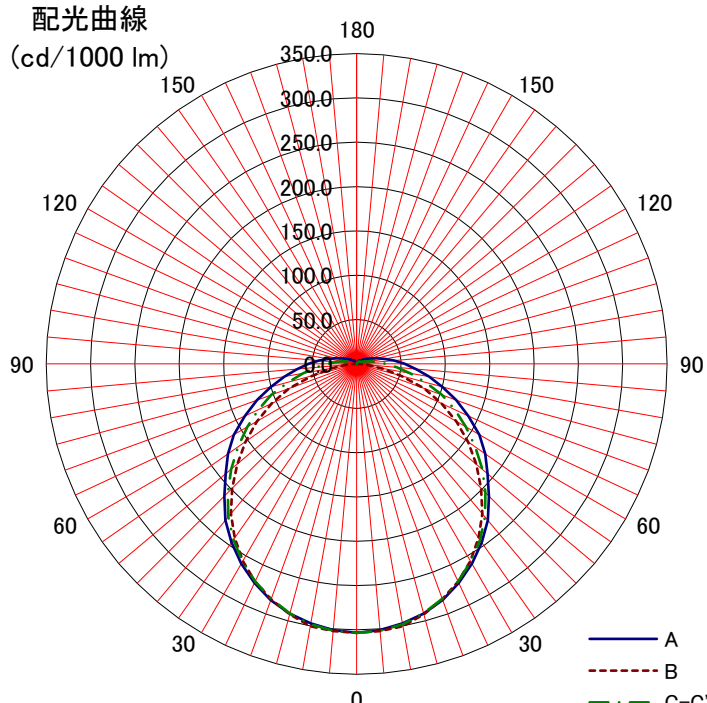


# 日立照明器具 照明特性

名称: 交換形LEDトラフ形		天井 反射率	80%			70%				50%			30%			0%															
			壁 70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%															
形式: WGP4A1		床 室指数	固有照明率 S/H=1.0															0%													
																		0%													
<備考> 防湿・防雨形 (オイルミスト対応)		0.6	0.56	0.44	0.36	0.54	0.43	0.35	0.30	0.41	0.35	0.30	0.40	0.34	0.29	0.27															
		0.8	0.65	0.53	0.45	0.63	0.52	0.45	0.39	0.51	0.44	0.39	0.49	0.43	0.38	0.35															
姿図 		1	0.71	0.60	0.52	0.69	0.59	0.52	0.46	0.57	0.50	0.45	0.55	0.49	0.44	0.42															
		1.25	0.77	0.67	0.59	0.75	0.66	0.59	0.53	0.63	0.57	0.52	0.61	0.55	0.51	0.48															
		1.5	0.81	0.72	0.65	0.79	0.71	0.64	0.59	0.68	0.62	0.57	0.66	0.61	0.56	0.53															
		2	0.87	0.79	0.73	0.85	0.78	0.72	0.67	0.75	0.70	0.65	0.72	0.68	0.64	0.60															
		2.5	0.91	0.84	0.78	0.88	0.82	0.77	0.72	0.79	0.74	0.70	0.76	0.72	0.69	0.65															
		3	0.93	0.87	0.82	0.91	0.85	0.80	0.76	0.82	0.78	0.74	0.79	0.75	0.72	0.69															
光源形式		4	0.96	0.91	0.87	0.94	0.89	0.85	0.82	0.86	0.83	0.80	0.83	0.80	0.77	0.74															
WGE407WWE-N14A1		5	0.98	0.94	0.90	0.96	0.92	0.89	0.86	0.89	0.86	0.83	0.86	0.83	0.81	0.77															
器具光束		7	1.01	0.98	0.95	0.99	0.96	0.93	0.91	0.93	0.90	0.88	0.89	0.88	0.86	0.82															
6,790 lm		10	1.03	1.01	0.99	1.01	0.99	0.97	0.95	0.96	0.94	0.92	0.92	0.91	0.90	0.86															
器具効率 Ft= 100%		<div>単体照度分布(初期値)</div>  <div>800 600 400 200</div> <div>3.0 1.5 0.0 1.5 3.0</div> <div>0.0 1.5 3.0</div> <div>A← 水平距離(m) →B</div> <div>(E)lx</div> <div>0-200 200-400 400-600 600-800 800-1000</div>																													
上方光束 Fu= 5.2%																															
下方光束 Fd= 94.8%																															
最大取付間隔																															
A-A 1.28 H																															
B-B 1.26 H																															
保守率	良	0.88																													
	中	0.86																													
	否	0.81																													
光度 (cd/1000 lm)		<div>配光曲線 (cd/1000 lm)</div>  <div>180 150 120 90 60 30 0</div> <div>350.0 300.0 250.0 200.0 150.0 100.0 50.0 0.0</div> <div>A B C-C'</div>																													
	A-0																B-B	C-0	A'-0	C'-0											
0	303																303	303													
10	297																300	298													
20	283																282	282													
30	260																257	257													
40	230																221	225													
50	193																176	185													
60	160																130	142													
70	119																81	102													
80	83																30	62													
90	54																1	33													
100	33																	17													
110	18																	7													
120	11																	5													
130	6																	4													
140	4																	3													
150	4																	2													
160																															
170																															
180																															