
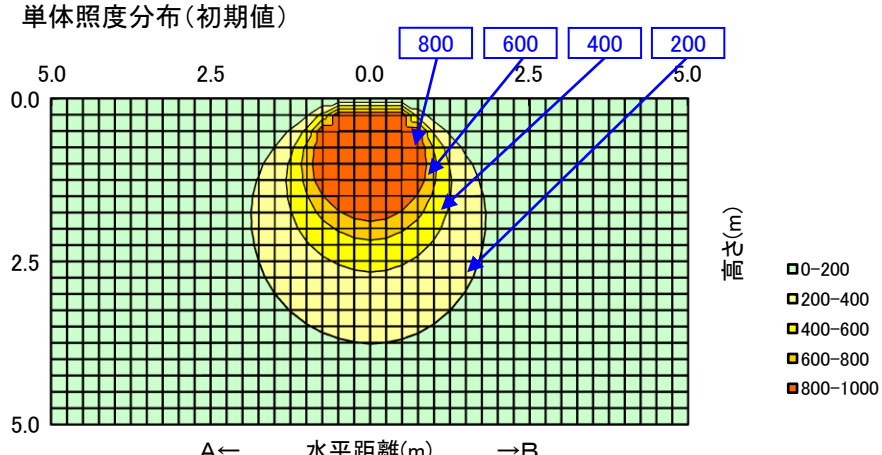
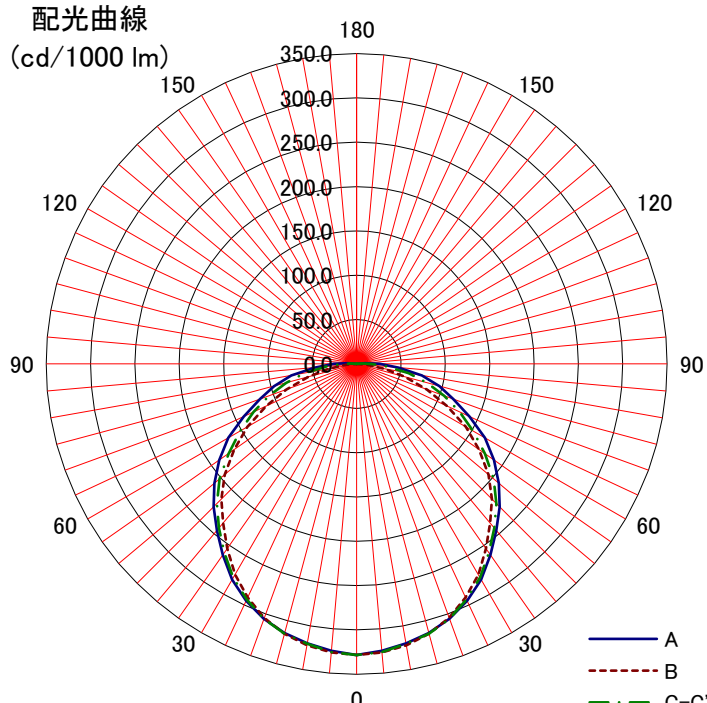


日立照明器具 照明特性

名称: 交換形LED笠付形	反射率	天井	80%				70%				50%			30%			0%																				
		壁	70%	50%	30%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%																					
		床	10%														0%																				
形式: WGP8B1	室指数	固有照明率 S/H=1.0																																			
<備考> 防湿・防雨形 (オイルミスト対応)	0.6	0.57	0.45	0.37	0.56	0.44	0.37	0.32	0.43	0.36	0.31	0.42	0.36	0.31	0.29																						
	0.8	0.67	0.55	0.47	0.65	0.54	0.47	0.41	0.53	0.46	0.41	0.51	0.45	0.40	0.38																						
姿図 	1	0.73	0.62	0.54	0.71	0.61	0.54	0.48	0.59	0.53	0.48	0.58	0.52	0.47	0.45																						
	1.25	0.79	0.69	0.61	0.77	0.68	0.61	0.55	0.66	0.60	0.55	0.64	0.59	0.54	0.52																						
	1.5	0.83	0.74	0.67	0.81	0.73	0.66	0.61	0.71	0.65	0.60	0.69	0.64	0.60	0.57																						
	2	0.89	0.81	0.75	0.87	0.80	0.74	0.69	0.78	0.73	0.68	0.76	0.71	0.68	0.65																						
	2.5	0.92	0.86	0.80	0.91	0.84	0.79	0.75	0.82	0.78	0.74	0.80	0.76	0.73	0.70																						
	3	0.95	0.89	0.84	0.93	0.88	0.83	0.79	0.85	0.81	0.77	0.83	0.79	0.76	0.74																						
光源形式	4	0.98	0.93	0.89	0.96	0.92	0.88	0.84	0.89	0.86	0.83	0.87	0.84	0.82	0.79																						
WGE404NE-N14A1	5	1.00	0.96	0.92	0.98	0.95	0.91	0.88	0.92	0.89	0.87	0.90	0.88	0.85	0.82																						
器具光束	7	1.02	1.00	0.97	1.01	0.98	0.96	0.93	0.96	0.94	0.92	0.94	0.92	0.90	0.87																						
8,640 lm	10	1.04	1.02	1.01	1.03	1.01	0.99	0.98	0.99	0.97	0.96	0.96	0.95	0.94	0.91																						
器具効率 Ft= 100%		<div>単体照度分布(初期値)</div> 																																			
上方光束 Fu= 0.6%																																					
下方光束 Fd= 99.4%																																					
最大取付間隔		<div>配光曲線</div> <div>(cd/1000 lm)</div> 																																			
A-A 1.28 H																																					
B-B 1.24 H																																					
保守率	良	0.86	<div>0-200</div> <div>200-400</div> <div>400-600</div> <div>600-800</div> <div>800-1000</div>																																		
	中	0.81																																			
	否	0.72																																			
光度 (cd/1000 lm)		<div>0</div> <div>10</div> <div>20</div> <div>30</div> <div>40</div> <div>50</div> <div>60</div> <div>70</div> <div>80</div> <div>90</div> <div>100</div> <div>110</div> <div>120</div> <div>130</div> <div>140</div> <div>150</div> <div>160</div> <div>170</div> <div>180</div>																																			
A-0																	B-B		C-0		A'-0		C'-0														
0																	328		328		328																
10		320		322		320																															
20		306		305		306																															
30		281		274		278																															
40		245		234		241																															
50		209		194		202																															
60		167		142		152																															
70		116		85		105																															
80		75		33		60																															
90		26				16																															
100																																					
110																																					
120																																					
130																																					
140																																					
150																																					
160																																					
170																																					
180																																					